




Aluminium Heatsink for IP-24 optics

Product Description:


- High performance extruded aluminium heatsink
- Stainless steel cable gland/strain relief
- Colors: Aluminium, other on demand.
- Optional cable HO7RN-F 2x0.75mm²
- Optional 2 poles connectors pôles IP-67
- Compatible optics from LEDIL - STRADA-IP-24 / HB-IP-24 / SPORT-
- IP-24 Compatible module LED 3x8 LED5050 type MST TECHNOLOGY
- Dimensions : 202x80x50 mm

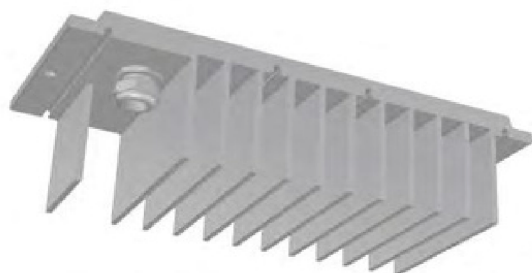


Lentille T2-M




Lentille DWC




Lentille T3-M




Lentille T4-B




Lentille VSM




Lentille HB-M




Lentille HB-W



Lentille HB-WWW




Lentille HB-O



SPORT-FT6W

Visit LEDiL.com
for other detail

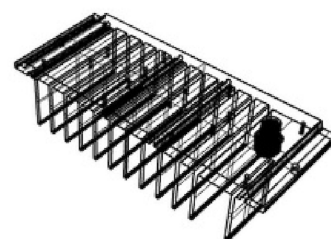

202×80×50mm

Dimensions

SIMULATION RESULTS & SUMMARY

Goal Name	Unit	Case 1	Case 2	Case 3
LED Engine Current	m	70	46	35
LED Engine Electrical Power	A	0	0	0
Ambient Temperature	W	31	20	15
LED Max Temperature	°C	25	25	25
HeatsinkMax Temperature	°C	50	42	38
PCB Max Temperature	°C	47	40	36
LensesMax Temperature	°C	49	41	37
	°C	55	46	41

