



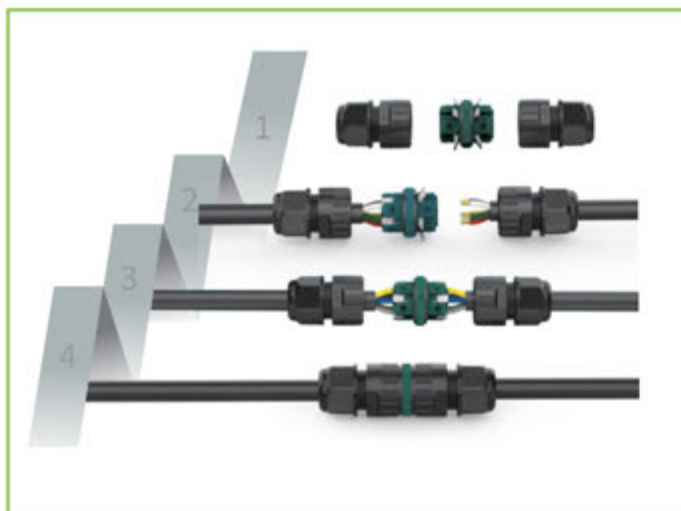


C-24-R




Number of poles: 2/3Pin
 Rated voltage: 450V
 Rated current: 16A
 Wire section: 0.5-2.5mm²
 Outer cable diameter: 3-5mm, 3.5-7mm,
 5-9mm, 9-12mm
 Ambient temperature: -40°C~+105°C
 IP Code: IP68

C-30-R



Number of poles: 4/5Pin
 Rated voltage: 450V
 Rated current: 16A
 Wire section: 0.5-2.5mm²
 Outer cable diameter: 5-9mm, 9-12mm,
 10-14mm
 Ambient temperature: -40°C~+105°C
 IP Code: IP68

C-30-W




Number of poles: 2/3Pin
 Rated voltage: 250V
 Rated current: 24A
 Wire section: 0.5-2.5mm²
 Outer cable diameter: 5-9mm, 9-12mm,
 10-14mm
 Ambient temperature: -40°C~+105°C
 IP Code: IP68

P-24-R




Number of poles: 2/3Pin
 Rated voltage: 450V
 Rated current: 16A
 Wire section: 0.5-2.5mm²
 Outer cable diameter: 5-9mm, 9-12mm
 Ambient temperature: -40°C~+105°C
 IP Code: IP68

P-24-W



Number of poles: 2Pin
 Rated voltage: 250V
 Rated current: 24A
 Wire section: 0.5-2.5mm²
 Outer cable diameter: 5-9mm, 9-12mm
 Ambient temperature: -40°C~+105°C
 IP Code: IP68

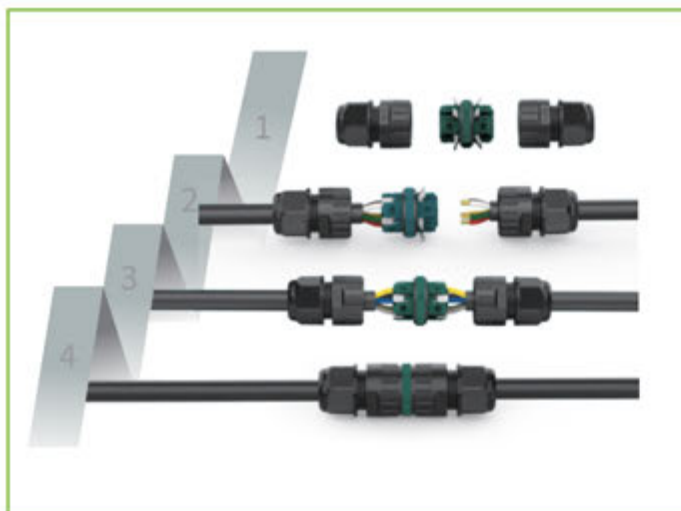

P-30-W




Number of poles: 3Pin
 Rated voltage: 250V
 Rated current: 24A
 Wire section: 0.5-2.5mm²
 Outer cable diameter: 5-9mm, 9-12mm, 10-14mm
 Ambient temperature: -40°C~+105°C
 IP Code: IP68

P+-24-W



Number of poles: 2Pin
 Rated voltage: 250V
 Rated current: 24A
 Wire section: 0.5-2.5mm²
 Outer cable diameter: 5-9mm, 9-12mm
 Ambient temperature: -40°C~+105°C
 IP Code: IP68

P+-30-W

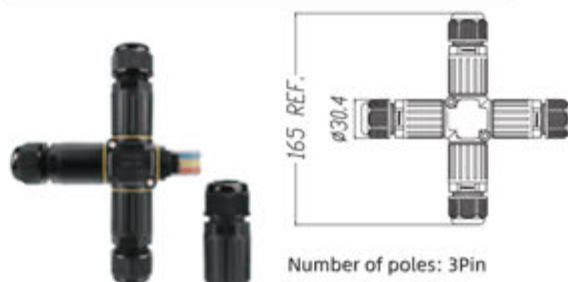

Number of poles: 3Pin
 Rated voltage: 250V
 Rated current: 24A
 Wire section: 0.5-2.5mm²
 Outer cable diameter: 5-9mm, 9-12mm, 10-14mm
 Ambient temperature: -40°C~+105°C
 IP Code: IP68

