

Model	Item Code	Output current	Input current	Input power	Output power range	PF	Efficiency	Output voltage	No load voltage
XSC70W350-1400-NFC-NX	158910	350-1400mA	≤0.40A	78.60W	3.50-70.00W	≥ 0.95	89%	10-50Vdc	59Vdc

*** Test result @230V, 50Hz, Full Load.**

1. Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	Output current setting	Near field communication (NFC)
	Output Features	Isolation
	IP Grade	IP67
	Insulation Class	Class II (compatible Class I)
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Range of DC Input Voltage	180-280VDC
	Frequency	0/50/60Hz, Range:0/47-63Hz
	Overvoltage protection	2h@380VAC, 48h@320VAC
	Input Current	≤0.40A max
	Input Power	≤78.60W max
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤10% (230VAC, full load) ; ≤15% (other loads)
	No-load Power Consumption	≤0.5W (230VAC, full load)
	Inrush Current	≤N/A (230VAC, full load)

	Connected quantity of 10A Breaker Connected quantity of 13A Breaker Connected quantity of 16A Breaker Connected quantity of 20A Breaker	N/A
Output	Output Voltage Range	10-50VDC@350-1400mA
	No Load Voltage	59VDC Max.
	Output Current	350-1400mA (by NFC setting, Factory set current of 350mA)
	Max. Output Power	70W
	Efficiency	≥89% (230VAC, full load)
	Output LF current ripple (< 120 Hz)	±3% (Imax-Imin) / (Imax+Imin)
	Current Accuracy	±5%
	PSTLM	≤1
	SVM	≤0.4
	Starting Time (AC mode)	≤0.5S (230VAC, full load)
Control Method	NFC current setting	The output current can be set within the total value range in 1-mA-steps. Output current is mean value. Setting is by EX·IVO's software APP/APK/PC with FEIG equipment or mobile phone
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery (not be hot swap)
	No-load Protection	Auto Recovery
	Insulation voltage	3000V 5mA 60S between P-S
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	<700μA,I/P to O/P @230V input
Environment	Ta/Operation Temperature	-40....+50℃
	Ts/Storage Temperature	-40....+90℃
	Tc/Enclosure Temperature	90℃
	Humidity	10%.... 90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Wire
	Installation	Independent
	PRI Wire preparation	500mm
	SEC Wire preparation	500mm
	SEC Wire preparation	0-0.8±0.05m (The EMC test results were achieved at approximately 0.8 meters) (the length required by the standard). If there are any data differences, please test according to the length required by the standard)
	Dimension	105*65.2*25.1mm(L*W*H)
Standards	Certification	CE
	Safety Standards	EN61347-1:2015/A1:2021; EN61347-2-13:2014/A1:2017;

Others	Performance	EN62384
	Surge	L/N-Ground:4kV; L-N:2kV
	RoHS	complied to 2011/65/EU
	Life Time	50000h Tc=85°C
		75000h Tc=80°C
		100000h Tc=75°C
	Warranty	5years , F.R. < 10000ppm

Remark:


- 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
- 2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again.

2. Midnight DIM

Midnight DIM Function is a function that reduces lighting levels during nighttime to improve energy efficiency.

The dimming profile is based on the midpoint of the operating time between power-on (sunset) and power-off (sunrise), referred to as the virtual midnight, rather than a fixed clock time. The difference between the virtual midnight and the actual midnight is defined as the midnight shift. This value is used to adjust the dimming schedule to ensure alignment with real-world night conditions.

Up to five dimming levels can be configured in the reference schedule, each with a defined output intensity and duration.

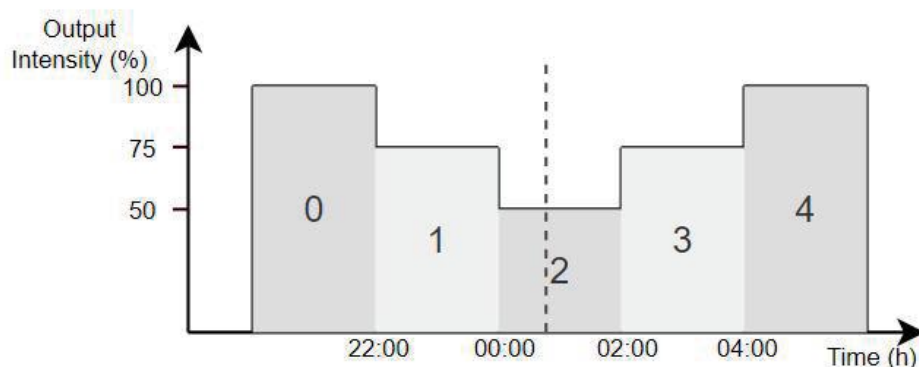


Parameter :


Parameter	Description	Default Value	Min Value	Max Value
Location	The location where the driver will be installed and the midnight shift will be calculated automatically as a mean value over the whole year.	Default	-	-

Astronomical Midnight	This line shows the astronomical midnight of the currently selected location. The shown time is the mean value taken over the year.	-	-	-
Power On Intensity	The function is started with the intensity set here.	100%	0%	100%
Reduction Intensity 1-4	Intensity for the selected time window.	100%	0%	100%
Reduction Time 1-4	The duration of the individual time windows.	120min	0min	720min
Dim Fade Time	Duration of change between intensity values of individual intensities.	5min	0s	16min
Switch Off Fade Time	Duration of change when switch off.	0s	0s	16min
Switch Off Fade Time	Duration of change when switch off.	0s	0s	16min


3. Label

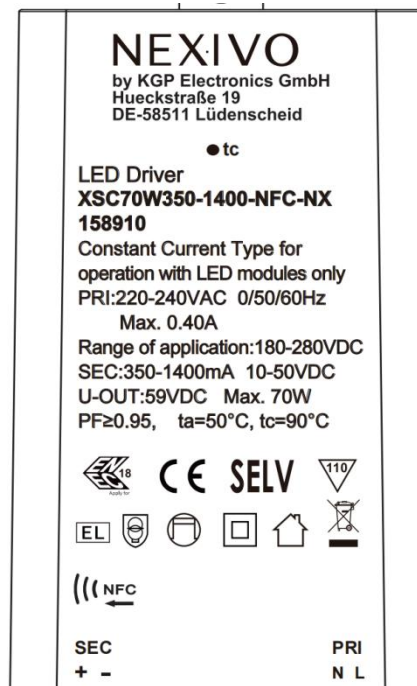


4. Dimension (Unit: mm)

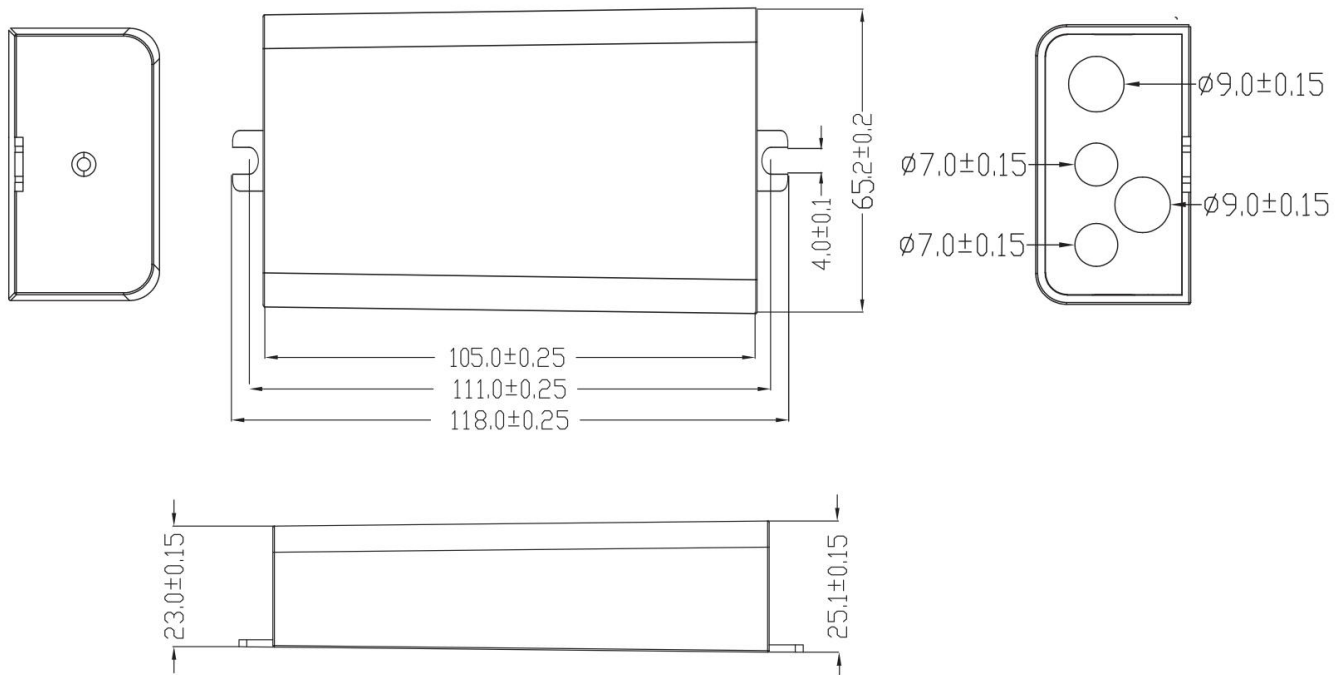

Wire

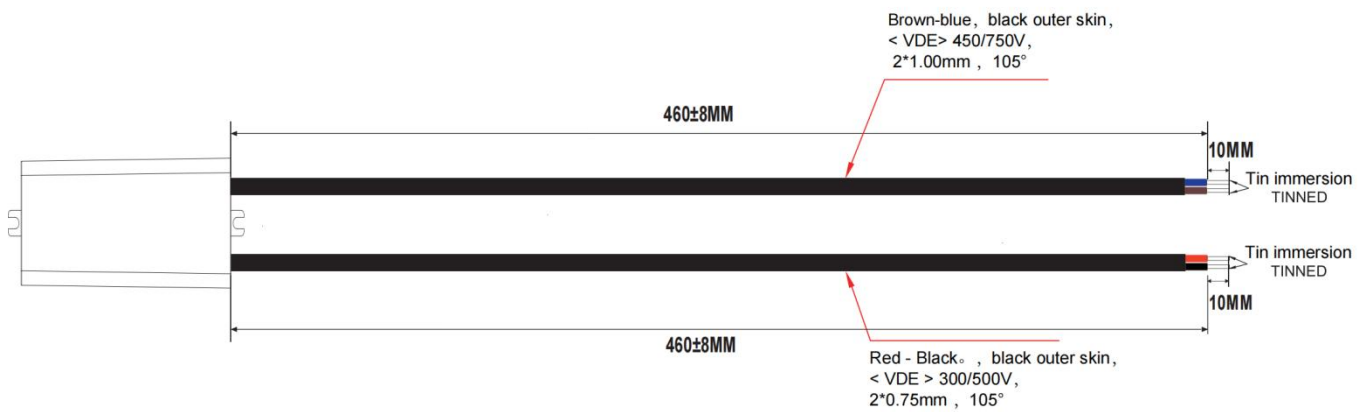


5. Wiring Diagram

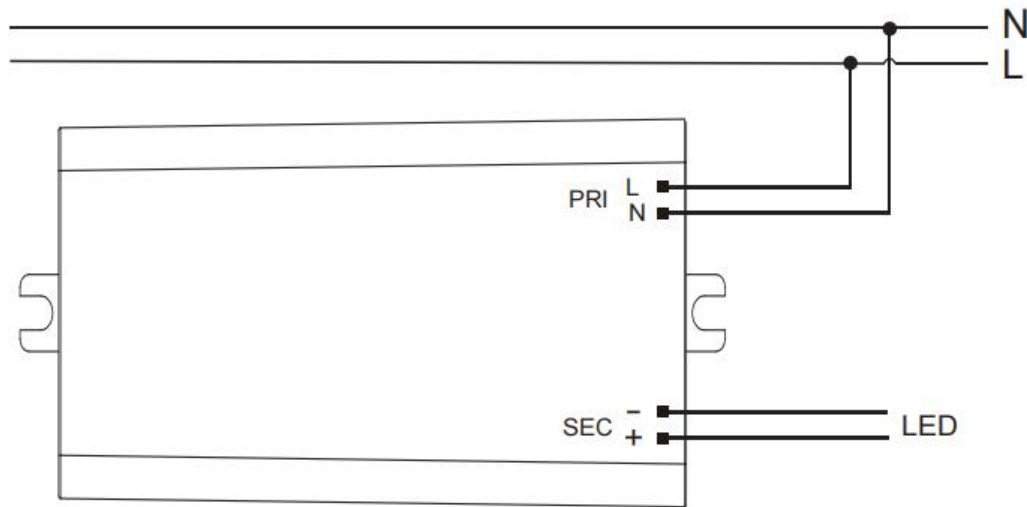


6. Electrical values


1. Operating power windows

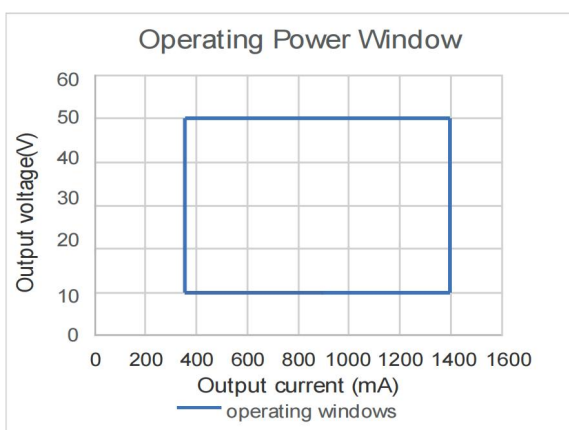

2. THD v.s. Load

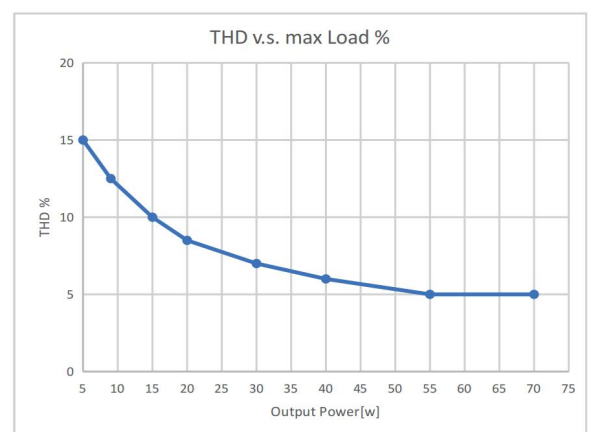

7. Packing information

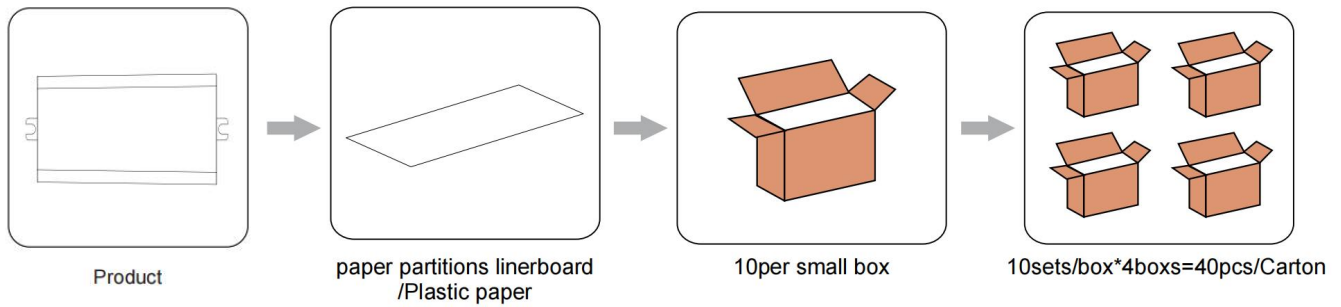

Inner box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
T.B.D	T.B.D	T.B.D	T.B.D	T.B.D

Outer box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
T.B.D	T.B.D	T.B.D	T.B.D	T.B.D

8. Ordering Data


Model No	Item code
XSC70W350-1400-NFC-NX	158910

9. NFC current setting:

NFC Reader (optional)

Feature:

Easily on-line read a output current from a driver or write a new current data to a driver throughout NEX·IVO NFC reader within few seconds.



Model No	Description	Interface	Matching antenna	Zhaga approval	Usage
ID CPR30+ 	Desktop programmer	USB	Integrated	Yes	Single Programming on Desktop
ID ISC.PRH101-USB 	Handheld programmer	USB	Integrated	Yes	Single Programming by Handheld
ID ISC.MR102-USB 	Middle range programmer, for connecting external antenna	USB	RF-MANT12786 	Yes	Single Programming on Product line
ID ISC.LR1002-E 	Long range programmer, for connecting external antenna	USB, RS232, TCP/IP	ID ISC.ANT310/310 	Yes	Multi Programming System

APP NFC

Feature:

Quickly check output current of a LED driver simply via iPhone smart phone, as well as, correct or setup a new current data immediately with no extra equipment at any job site

iPhone ICON



Main



Download method

1.Scan the QR code to download



2.On your iPhone, search for KGP NFC in APP Store to download it



Phone smartphones with NFC can be downloaded and used directly

Download method

1.Scan the QR code to download



Android smartphones with NFC can be downloaded and used directly

Android ICON



Main



Product	Description	Interface	Matching antenna	Zhaga approval	Usage
ID ECCO Smart HF-BLE 	Handheld wireless programmer	USB,Bluetooth LE V4.2 & V5.0	Integrated	Yes	Handheld programming, installation and maintenance work

10. REVISION HISTORY

Date	Revision	Remark
2026.16.03	V0.01	Product release
2026.27.06	V0.02	Add the logo for applying for ENEC certification