



Model	Item Code	Output current	Input current	Input power	Output power range	PF	Efficiency	Output voltage	No load voltage
XSC44W300-1050-DALI-NFC-NX	158930	300-1050mA	≤0.25A	49.50W	0.80-44.10W	≥0.96	89%	2.5-45Vdc	59Vdc

*** Test result @230V, 50Hz, Full Load.**

1. Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	Amplitude (DALI-2)
	Output current setting	Near field communication (NFC)
	Output Features	Isolation
	IP Grade	IP67
	Insulation Class	Class II
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Range of DC Input Voltage	180-280VDC
	Frequency	0/50/60Hz, Range:0/47-63Hz
	Overvoltage protection	2h@380VAC, 48h@320VAC
	Input Current	≤0.25A max
	Input Power	≤49.50W max
	Power Factor	≥0.96 (230VAC, full load)
	THD	≤10% (230VAC, full load)
		≤15%@15W ≤ Output Power ≥ 25W
	Standby Power Consumption	≤0.45W @230VAC (DALI system DIM to off)
	Inrush Current	≤9.4A/2.6us (230VAC, full load)

	Connected quantity of 10A Breaker	20pcs/type A ; 33pcs/type B ; 53pcs/type C
	Connected quantity of 13A Breaker	26pcs/type A ; 43pcs/type B ; 69pcs/type C
	Connected quantity of 16A Breaker	33pcs/type A; 53pcs/type B ; 85pcs/type C
	Connected quantity of 20A Breaker	41pcs/type A; 66pcs/type B ; 106pcs/type C
Output	Output Voltage	2.5-45VDC@300-900mA 2.5-42VDC@950-1050mA
	No Load Voltage	59VDC Max.
	Output Current	300-1050mA (by NFC setting, Factory set current of 300mA)
	Max. Output Power	44.1W
	Efficiency	≥89% (230VAC, full load)
	Output LF current ripple (< 120 Hz)	±3% (Imax-Imin) / (Imax+Imin)
	Current Accuracy	±5%
	PSTLM	≤1
	SVM	≤0.4
	Starting Time (AC mode)	≤0.8S (230VAC, full load, by DALI system)
	Starting Time (DC mode)	≤0.4S
	Switching over time (AC/DC)	≤0.4S
Control Method	Secondary PUSH dimming	Secondary PUSH dimming (Max. lead wire length: 20m, same port of DALI)
	PUSH-button	Max parallel connections qty for Push-dim 15
	DALI function	DALI dimming (Max. lead wire length: 300m) logarithm or linear dimming curve selectable
	Dimming range	DALI dimming:1%-100%
	NFC current setting	The output current can be set within the total value range in 1-mA-steps. Output current is mean value. Setting is by EX·IVO's software APP/APK/PC with FEIG equipment or mobile phone
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery (not be hot swap)
	No-load Protection	Auto Recovery
	Insulation voltage	3000V 5mA 60S between P-S
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	<700μA,I/P to O/P @230V input
Environment	Ta/Operation Temperature	-40....+50℃
	Ts/Storage Temperature	-40....+90℃
	Tc/Enclosure Temperature	90℃
	Humidity	10%.... 90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Wire
	Installation	Independent
	PRI Wire preparation	500mm
	SEC Wire preparation	500mm


	DALI Wire preparation	320mm
	SEC Wire preparation	0-0.8±0.05m (The EMC test results were achieved at approximately 0.8 meters) (the length required by the standard). If there are any data differences, please test according to the length required by the standard)
	Dimension	95*45.2*25.1mm (L*W*H)
Standards	Certification	CE
	Safety Standards	EN61347-1:2015/A1:2021; EN61347-2-13:2014/A1:2017;
	Performance	EN62384
	DALI Performance	EN 62386-101 (DALI-2) EN 62386-102 (DALI-2) EN 62386-207 (DALI-2, including part 251, 252, 253)
	Surge	L/N-Ground:4kV; L-N:2kV
	RoHS	complied to 2011/65/EU
Others	Life Time	50000h Tc=90°C
		75000h Tc=85°C
		100000h Tc=80°C
	Warranty	5years , F.R. < 10000ppm
Remark: 1.All Parameters,if not specified,are measured at 230VAC/50Hz and 25°C ambient temperature. 2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again. 3.Please make sure Tc under Lifetime condition when long term operate under DC input. 4.DC emergency (DCemDim):Default 15%, EOFx range = 1 .. 100% (EOFx = DCemDIM level) 5.During the PUSH DIM test, the number of parallel connections must be less than 15PCS.		

2. Midnight DIM

Midnight DIM Function is a function that reduces lighting levels during nighttime to improve energy efficiency.

The dimming profile is based on the midpoint of the operating time between power-on (sunset) and power-off (sunrise), referred to as the virtual midnight, rather than a fixed clock time. The difference between the virtual midnight and the actual midnight is defined as the midnight shift. This value is used to adjust the dimming schedule to ensure alignment with real-world night conditions.

Up to five dimming levels can be configured in the reference schedule, each with a defined output intensity and duration.

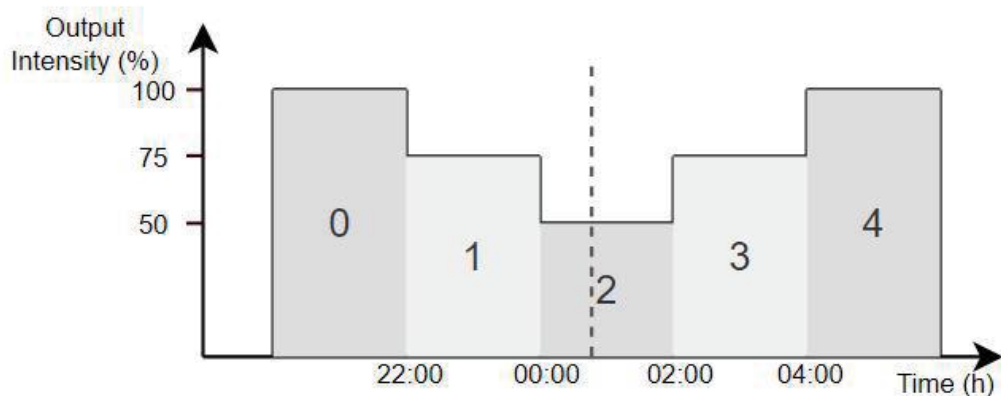


Parameter :


Parameter	Description	Default Value	Min Value	Max Value
Location	The location where the driver will be installed and the midnight shift will be calculated automatically as a mean value over the whole year.	Default	-	-
Astronomical Midnight	This line shows the astronomical midnight of the currently selected location. The shown time is the mean value taken over the year.	-	-	-
Power On Intensity	The function is started with the intensity set here.	100%	0%	100%
Reduction Intensity 1-4	Intensity for the selected time window.	100%	0%	100%
Reduction Time 1-4	The duration of the individual time windows.	120min	0min	720min

Dim Fade Time	Duration of change between intensity values of individual intensities.	5min	0s	16min
Switch Off Fade Time	Duration of change when switch off.	0s	0s	16min
Switch Off Fade Time	Duration of change when switch off.	0s	0s	16min


3. Label

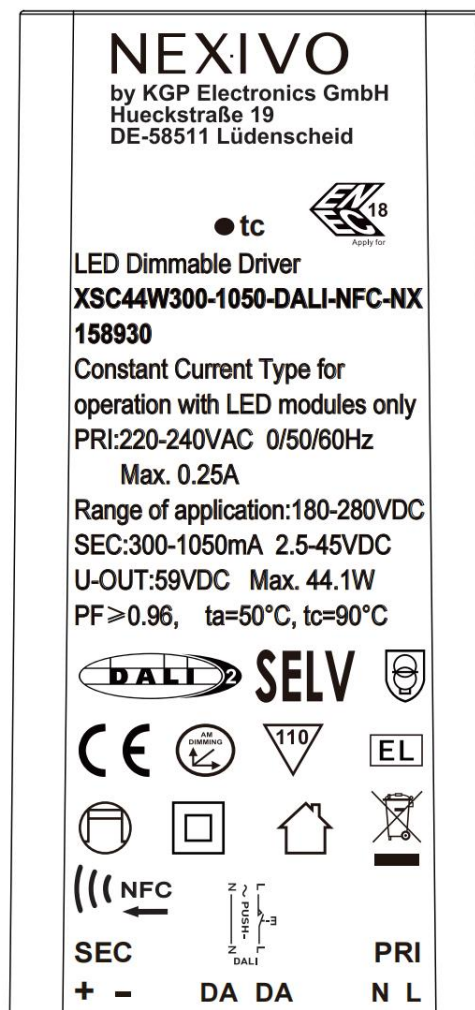

4. Dimension (Unit: mm)

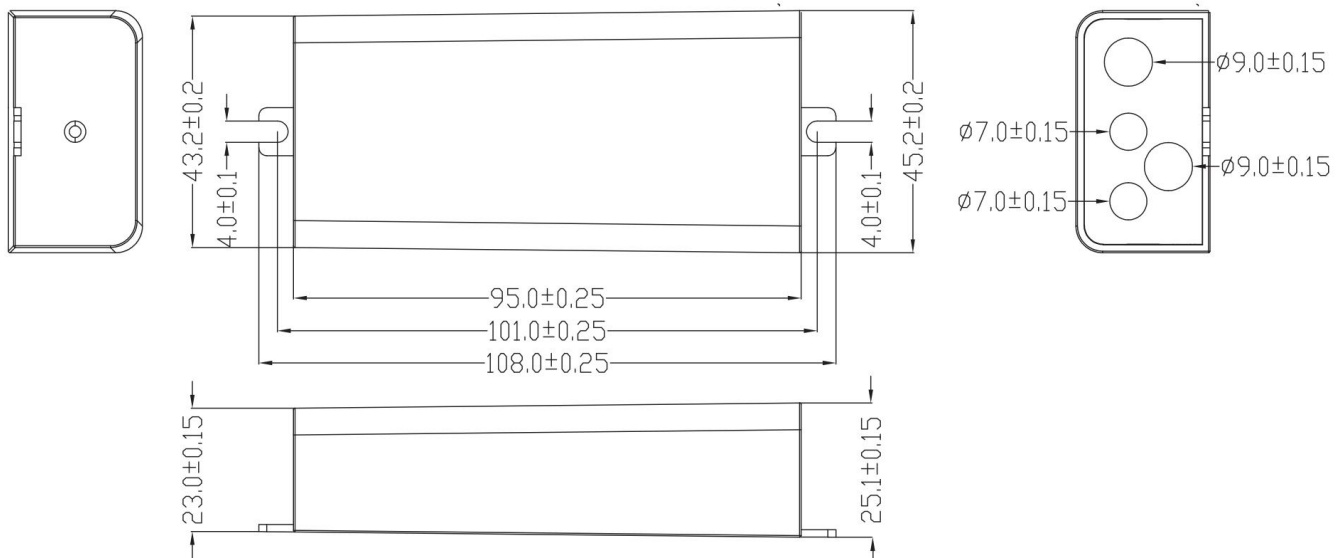


Wire

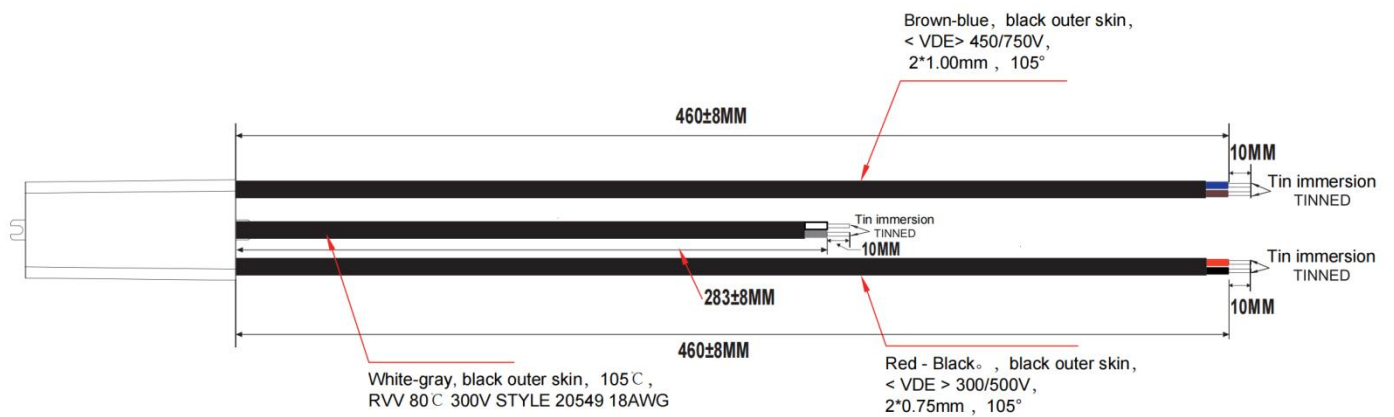


5. Wiring Diagram

DALI Dimming

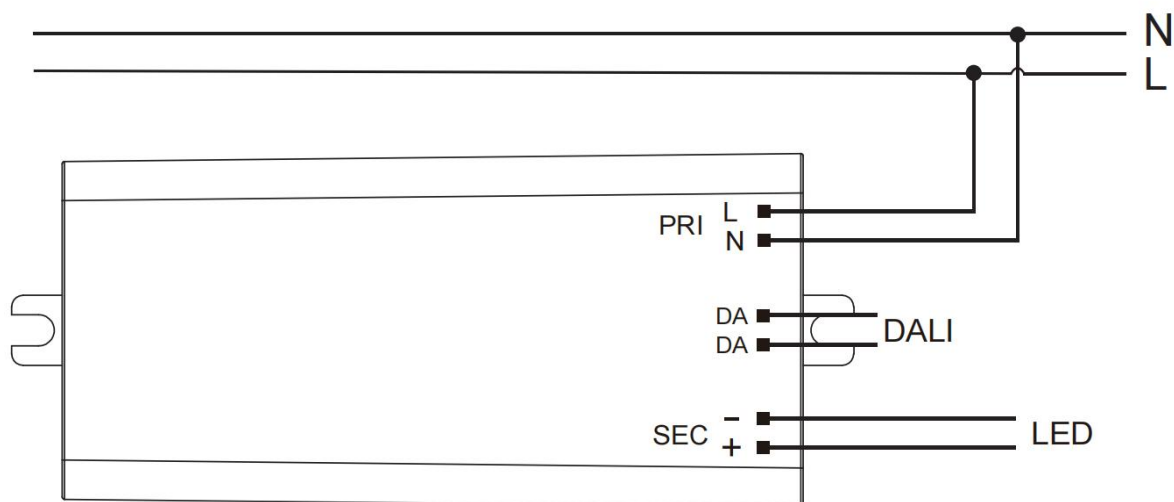


Push Dimming

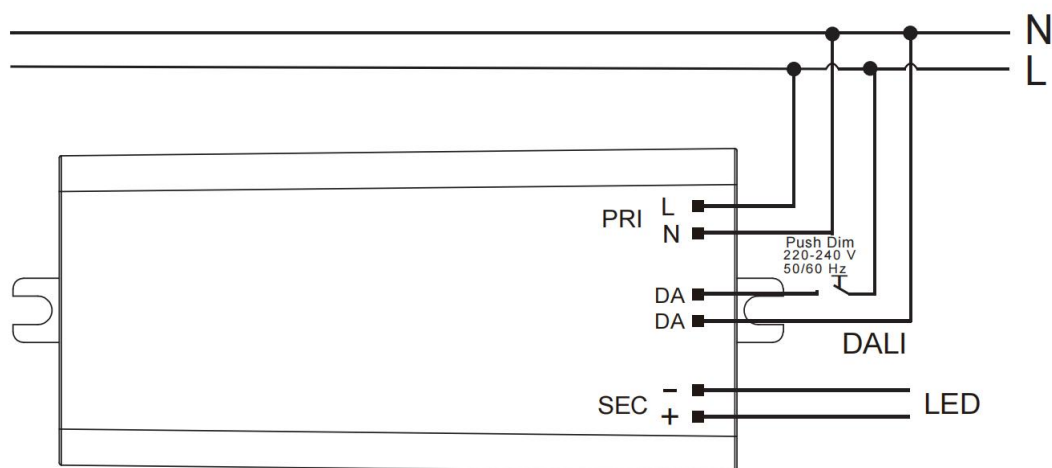


6. Electrical values


1. Operating power windows

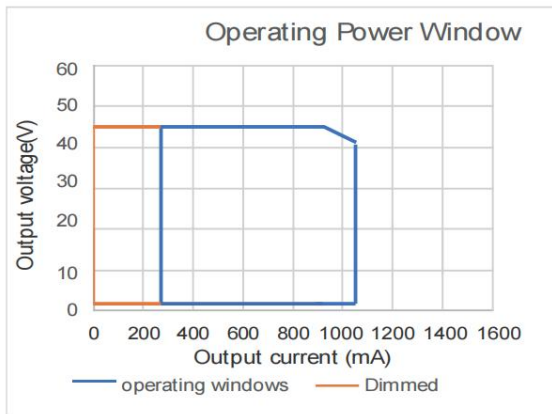


2. Efficiency v.s. Load

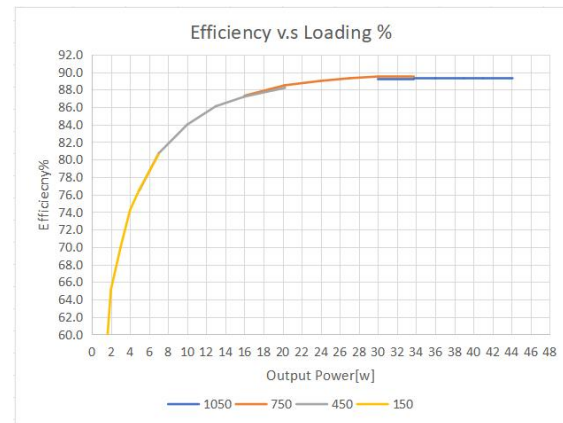


3. PF v.s. Load

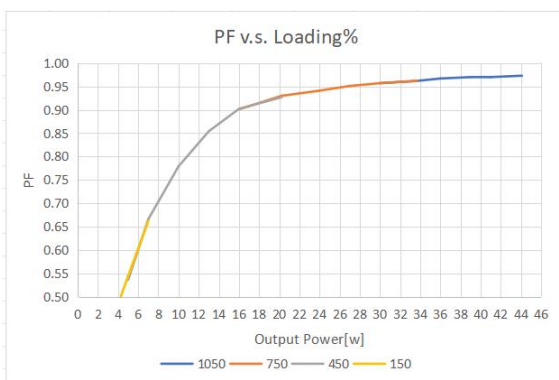


4. THD v.s. Load

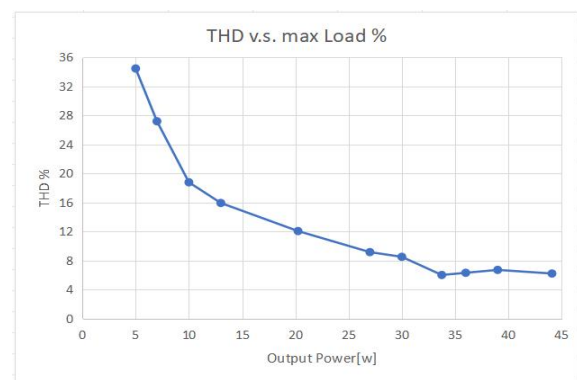

5. Life time

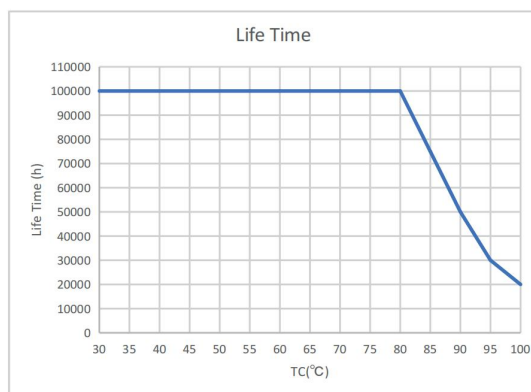

6. Derating

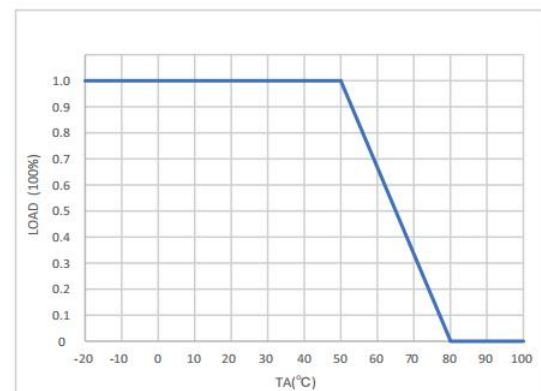


7. DALI dimming curve

formula for DALI dimming.


$$X(n)=10^{\{[(n-1)/(253/3)]-1\}},$$

Here, n means the target dimming stage of the total 254 stages.

X(n) means the percent of the maximum output current

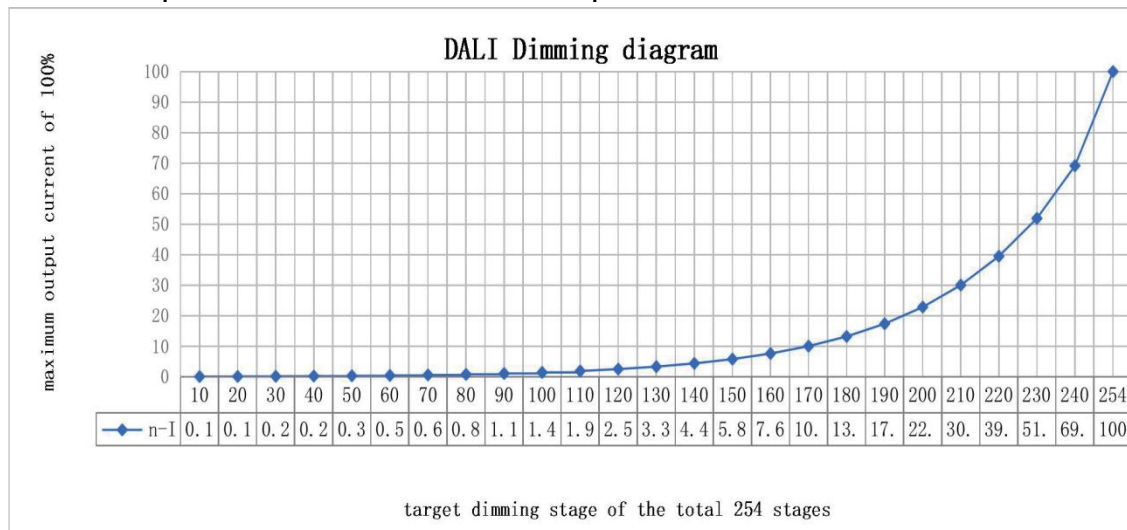

8. Packing information

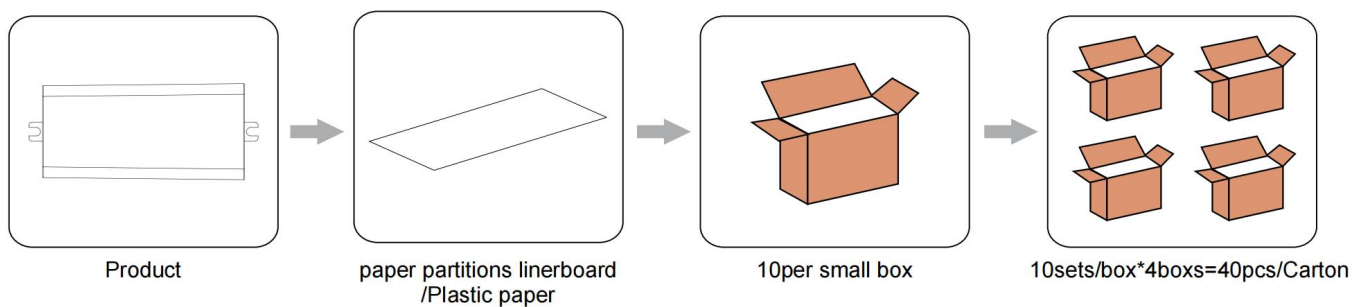

Inner box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
T.B.D	T.B.D	T.B.D	T.B.D	T.B.D

Outer box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
T.B.D	T.B.D	T.B.D	T.B.D	T.B.D

9. Ordering Data


Model No	Item code
XSC44W300-1050-DALI-NFC-NX	158930

10. NFC current setting:

NFC Reader (optional)

Feature:

Easily on-line read a output current from a driver or write a new current data to a driver throughout NEX·IVO NFC reader within few seconds.



Model No	Description	Interface	Matching antenna	Zhaga approval	Usage
ID CPR30+ 	Desktop programmer	USB	Integrated	Yes	Single Programming on Desktop
ID ISC.PRH101-USB 	Handheld programmer	USB	Integrated	Yes	Single Programming by Handheld
ID ISC.MR102-USB 	Middle range programmer, for connecting external antenna	USB	RF-MANT12786 	Yes	Single Programming on Product line
ID ISC.LR1002-E 	Long range programmer, for connecting external antenna	USB, RS232, TCP/IP	ID ISC.ANT310/310 	Yes	Multi Programming System

APP NFC

Feature:

Quickly check output current of a LED driver simply via iPhone smart phone, as well as, correct or setup a new current data immediately with no extra equipment at any job site

iPhone ICON



Main



Download method

1.Scan the QR code to download



2.On your iPhone, search for KGP NFC in APP Store to download it



Phone smartphones with NFC can be downloaded and used directly

Download method

1.Scan the QR code to download



Android smartphones with NFC can be downloaded and used directly

Android ICON



Main



Product	Description	Interface	Matching antenna	Zhaga approval	Usage
ID ECCO Smart HF-BLE 	Handheld wireless programmer	USB,Bluetooth LE V4.2 & V5.0	Integrated	Yes	Handheld programming, installation and maintenance work

11. Constant light output (CLO)

<https://www.kdocs.cn/l/cbWalbA1eiBv>

12. Push Dim :

12.1 On / off:

Short push (120ms-600ms) on the switch

Stepless dimming: long push (> 0.6sec) on the switch

12.2 Power-on memory function

When the LED driver is powered on, it will restore the memory before the LED driver is powered off. (brightness remembers the brightness after the last dimming is stable, and the brightness during dimming is not memorized)

12.3 Light on/off

If the light is on, the light will be off after a short press. If the light is off, the light will be on after a short press. The time range of short press is 120-600ms.

12.4 PUSH Dimming

Press and hold the push switch for a long time, the light will enter the dimming state, if the previous time is dimming, it will automatically turn to dimming the next time. After releasing the reset button, the dimming stops and the current illuminance is maintained. The dimming range is 1%-100%. The default is to dim when the power is first long-press. If the brightness of the power-on is the maximum brightness, the first long-press is to dim. (Long press 0.6-3S to start dimming.)

12.5 Forced synchronization

Long press for 10 seconds to turn on all the lights and turn on the same brightness (50%), and continue to quickly short press will not change. After a short period of time without short press operation, the module exits the synchronization mode, and the short press restores the switch function.

12.6 PUSH Dimming rate

Long press the push switch 10S to switch the dimming rate to 3S, Long press the push switch 20S to switch the dimming rate to 6S.

13. REVISION HISTORY

Date	Revision	Remark
2026.16.03	V0.01	Product release
2026.27.06	V0.02	Add the logo for applying for ENEC certification