



# NEON SLIM 5X3 2D

W: 5mm  
x  
H: 3mm

## Vertical Bending

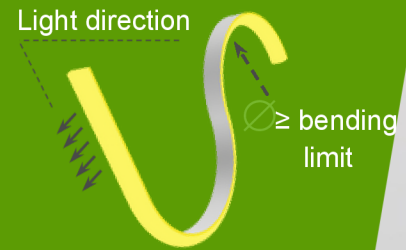

## Cross Section

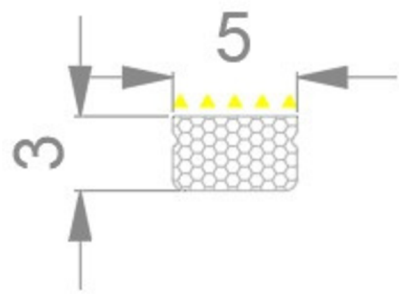

## End Processing

Axial-Entry




Injection Molding



## Mounting Accessory

Aluminum Channel

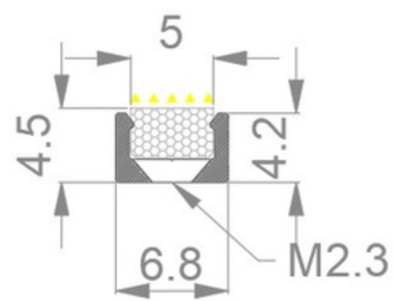


Length: 20mm



Length: 1000mm

3M adhesive tape

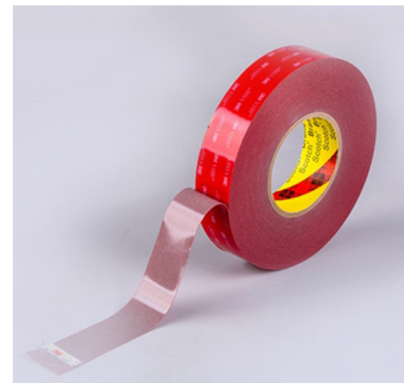

## Parameter

### NEON SLIM 5X3 2D -Mono White

※ 1800K, 2100K, 2400K, 5000K available

Item Code	CRI	Power /m	2700K	3000K	4000K	6500K	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	Ra≥90	4 W	512 lm	551 lm	578 lm	573 lm	7 m	DC24V	Free Cut	∅ ≥30mm	IP65
	Ra≥90	8 W	852 lm	916 lm	962 lm	953 lm	5 m	DC24V	Free Cut	∅ ≥30mm	IP65
	Ra≥90	12 W	1183 lm	1272 lm	1335 lm	1323 lm	4 m	DC24V	Free Cut	∅ ≥30mm	IP65

### NEON SLIM 5X3 2D -Single Color

※ Any color from Chromaticity Diagram is available.

Item Code	CRI	Power /m	Single Red	Single Green	Single Blue	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	Ra≥90	5.0 W	187 lm	549 lm	130 lm	5 m	DC24V	50mm	∅ ≥30mm	IP65
		9.0 W	332 lm	990 lm	233 lm	3 m	DC24V	50mm	∅ ≥30mm	IP65
		12.0 W	446 lm	1322 lm	311 lm	3 m	DC24V	50mm	∅ ≥30mm	IP65
		14.0 W	518 lm	1540 lm	363 lm	2.5 m	DC24V	50mm	∅ ≥30mm	IP65

