



NEON 1515 3D

W: 15mm
x
H: 15mm


3D Bending

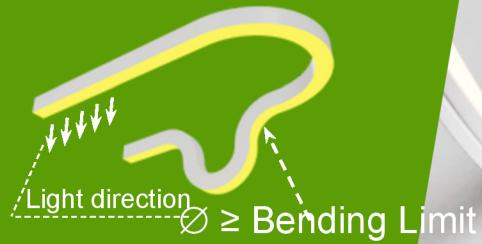

Cross Section




End Processing

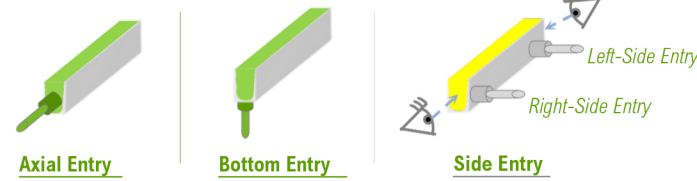

Mounting Accessory

Aluminum Channel

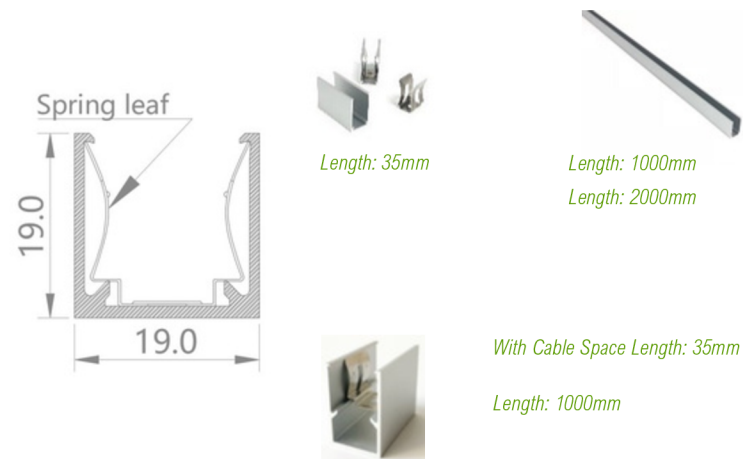

Stainless Steel Channel



LIGHT & SMART

Parameter

NEON 1515 3D-Mono White

※ 1800K, 2100K, 2400K, 5000K available

Item Code	CRI	Power /m	2700K	3000K	4000K	6500K	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	Ra≥90	5 W	281 lm	302 lm	318 lm	315 lm	8 m	DC24V	50mm	Ø≥300mm	IP67
	Ra≥90	10 W	546 lm	587 lm	616 lm	610 lm	5 m	DC24V	50mm	Ø≥300mm	IP67
	Ra≥90	12 W	750 lm	816 lm	832 lm	856 lm	5 m	DC24V	50mm	Ø≥300mm	IP67
	Ra≥90	5 W	262 lm	265 lm	292 lm	289 lm	7.5 m	DC24V	Free Cut	Ø≥300mm	IP67
	Ra≥90	10 W	511 lm	516 lm	567 lm	562 lm	5 m	DC24V	Free Cut	Ø≥300mm	IP67

NEON 1515 3D-Dynamic White

※ Other color range available

Item Code	CRI	Power /m	Max	2700K ~ 6500K	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate	
	Ra≥90	2x 8 W	391 lm	375 lm	391 lm	5 m	DC24V	50mm	Ø≥300mm	IP67

*** Note: Total Operating power must be within single channel max power.

LIGHT & SMART

300 Avenue de l'Europe 77310 Saint Fargeau Ponthierry
SIRET: 8497311200028 N° de TVA: FR04849731120
300 Avenue de l'Europe 77310 Saint Fargeau Ponthierry
contact@lightandsmart.com www.lightandsmart.com
SIRET: 8497311200028 N° de TVA: FR04849731120
contact@lightandsmart.com www.lightandsmart.com