


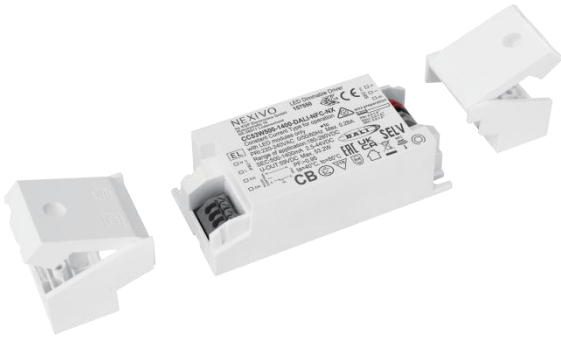

Model	Item Code	Output current	Input current	Input power	Output power range	PF	Efficiency	Output voltage	No load voltage
CC53W500-1400-DALI-NFC-NX	157550	500-1400mA	≤0.28A	59.80W	1.30-53.20W	≥0.95	89%	2.5-44Vdc	59Vdc

*** Test result @230V, 50Hz, Full Load.**

1. Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	Amplitude (DALI-2)
	Output current setting	Near field communication (NFC)
	Output Features	Isolation
	IP Grade	IP20
	Insulation Class	Class II (compatible Class I)
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Range of DC Input Voltage	180-280VDC
	Frequency	0/50/60Hz, Range:0/47-63Hz
	Overvoltage protection	2h@380VAC, 48h@320VAC
	Input Current	≤0.28A max
	Input Power	≤59.8W max
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤11% (230VAC, full load)
	Standby Power Consumption	≤0.45W @230VAC (DALI system DIM to off)
	Inrush Current	≤10.1A/16us (230VAC, full load)

	Connected quantity of 10A Breaker Connected quantity of 13A Breaker Connected quantity of 16A Breaker Connected quantity of 20A Breaker	19pcs/type A ;30pcs/type B ;49pcs/type C 25pcs/type A ;40pcs/type B ;64pcs/type C 30pcs/type A;49pcs/type B ;79pcs/type C 38pcs/type A;61pcs/type B ;99pcs/type C
Output	Output Voltage Range	2.5-44VDC@500-1200mA; 2.5-42VDC@1250mA 2.5-40VDC@1300mA; 2.5-39VDC@1350mA 2.5-38VDC@1400mA
	No Load Voltage	59VDC Max.
	Output Current	500-1400mA (by NFC setting , Factory set current of 500mA)
	Max. Output Power	53.2W
	Efficiency	≥89% @1100mA, 230VAC
	Output LF current ripple (< 120 Hz)	±3% (Imax-Imin) / (Imax+Imin)
	Current Accuracy	±5%
	PSTLM	≤1
	SVM	≤0.4
	Starting Time (AC mode)	≤0.8S (230VAC, full load, by DALI system)
	Starting Time (DC mode)	≤0.4S
	Switching over time (AC/DC)	≤0.4S
Control Method	Secondary PUSH dimming	Secondary PUSH dimming (Max. lead wire length: 20m, same port of DALI)
	PUSH-button	Max parallel connections qty for Push-dim 15
	DALI function	DALI dimming (Max. lead wire length: 300m) logarithm or linear dimming curve selectable
	Dimming range	DALI dimming:1%-100%
	NFC current setting	The output current can be set within the total value range in 1-mA-steps. Output current is mean value. Setting is by EX·IVO's software APP/APK/PC with FEIG equipment or mobile phone
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery (not be hot swap)
	No-load Protection	Auto Recovery
	Insulation voltage	3000V 5mA 60S between P-S
	Insulation resistance	>100M ohm @ 500VDC L/N to PE
	Leakage current	<700μA,I/P to O/P@230V input
Environment	Ta/Operation Temperature	-20....+40℃
	Ts/Storage Temperature	-20....+85℃
	Tc/Enclosure Temperature	85℃
	Humidity	10%.... 90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Push-in Terminal


	Installation	Build-in & Independent
	PRI Wire preparation	PVC,VDE certificated,0.5-1.5 ,with 8mm tin
	SEC Wire preparation	PVC,VDE certificated,0.5-1.5 ,with 8mm tin
	DALI Wire preparation	PVC,VDE certificated,0.5-1.5 , 8mm
	SEC Wire preparation	0-0.8±0.05m (The EMC test results were achieved at approximately 0.8 meters) (the length required by the standard). If there are any data differences, please test according to the length required by the standard)
	Dimension	97*43*30mm (L*W*H)
Standards	Certification	CE/ENEC/SAA/UKCA/EAC/CB
	Safety Standards	EN61347-1:2015/A1:2021; EN61347-2-13:2014/A1:2017; EN62384:2006/A1:2009; AS 61347.2.13:2018; AS/NZS61347.1:2016; BS EN61347-1:2015/A1:2021; BS EN61347-2-13:2014/A1:2017; IEC 61347-1:2015+A1:2017; IEC 61347-2-13:2014+A1:2016;
	EMC Standards	AS/NZS CISPR 15:2011; AS CISPR 15:2017 ; BS EN IEC 55015:2019+A11:2020; EN 61547:2009; BS EN IEC 61000-3-2:2019; BS EN 61000-3-3:2013+A1:2019;
	Performance	EN62384
	DALI Performance	EN 62386-101 (DALI-2) EN 62386-102 (DALI-2) EN 62386-207 (DALI-2, including part 251, 252, 253)
	Surge	L/N-Ground:2kV; L-N:1kV
Others	RoHS	complied to 2011/65/EU
	Life Time	50000h Tc=85℃
		75000h Tc=80℃
		100000h Tc=75℃
	Warranty	5years , F.R. < 10000ppm

Remark:

- 1.All Parameters,if not specified,are measured at 230VAC/50Hz and 25℃ ambient temperature.
- 2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again.
- 3.Please make sure Tc under Lifetime condition when long term operate under DC input.
- 4.DC emergency (DCemDim):Default 15%, EOFx range = 1 .. 100% (EOFx = DCemDIM level)
- 5.During the PUSH DIM test, the number of parallel connections must be less than 15PCS.
- 6.When the lamps and the power supply are connected in a common ground state, there is no residual light phenomenon when the output voltage is above 12V, but there is residual light phenomenon when the output voltage is below 12V.


Distance	15m	30m	50m
Cable selection	0.5mm ²	0.75mm ²	1.0mm ²

2. Label

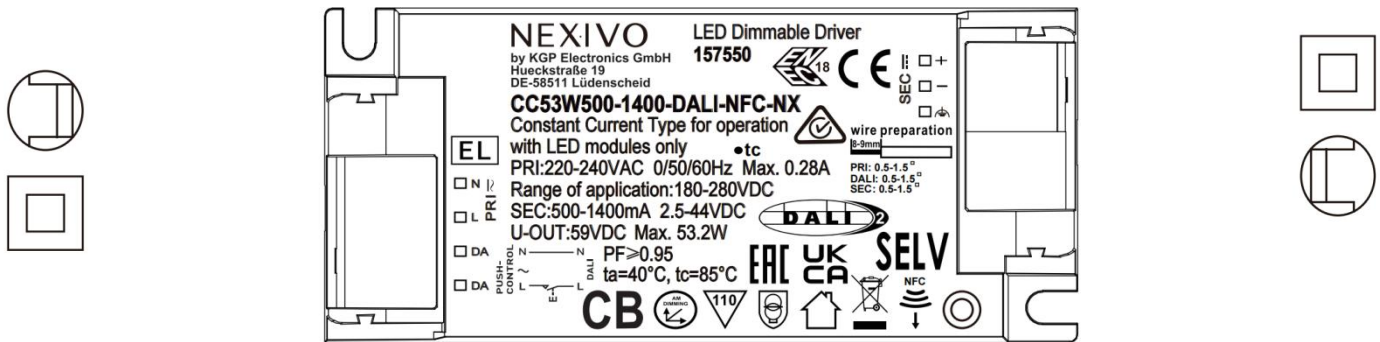


3. Dimension (Unit: mm)

Built in type:

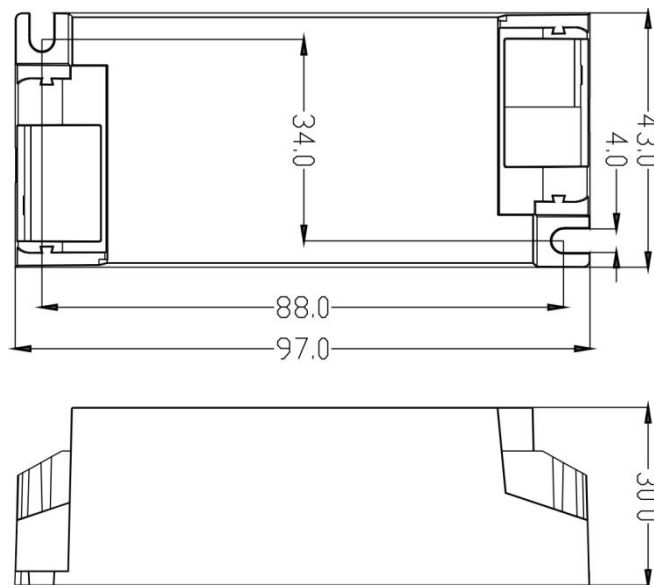


Compatible Small Strain reliefs: SR_CC53-60
 Compatible Large Strain reliefs: SR_CC53-60_5POL


Small Strain reliefs

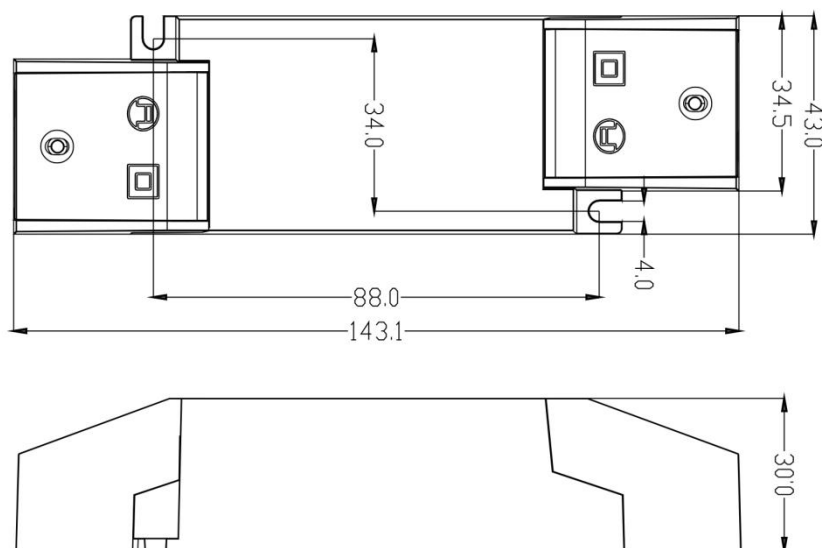

Large Strain reliefs

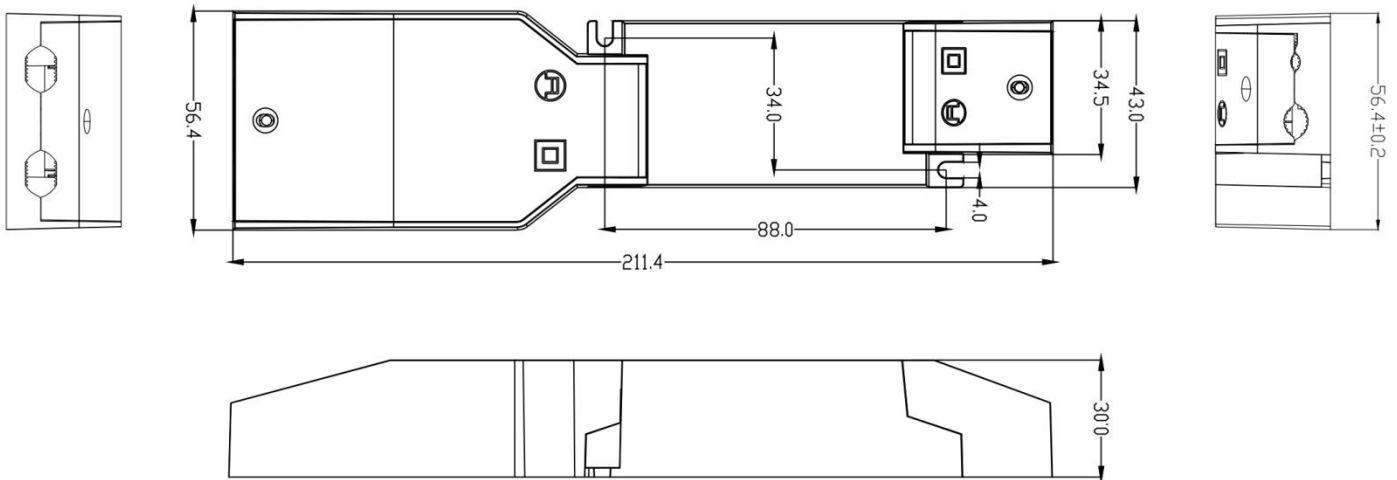

Large Strain reliefs specifications

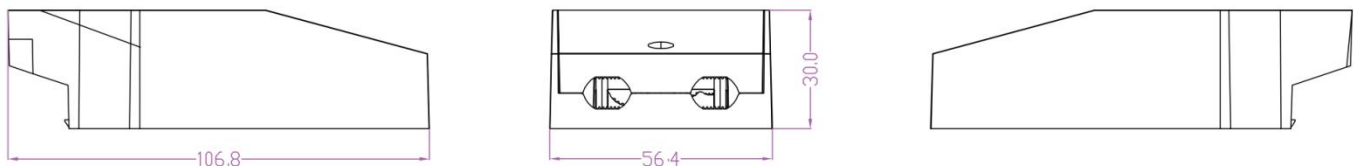

Tolerance for dimensions ± 0.1 mm

Mechanical, Operating & Storage Conditions

Driver cross-section dimensions: 55.4-57.4 x 29.0-31.0 mm

Wire size: 0.5 - 2.5 mm²

Ambient temperature range: -20...+50 °C


Storage temperature range: -20...+85 °C

Assembly temperature range: +5...+30 °C



Do not store in wet or humid environment!

*Unless otherwise stated in the driver datasheet (for independent installation).
Note! Tc max temperature of the driver shall not be exceeded.

Terminal





5 - pole connector for DA / CC drivers with LC-SRB-LOOP

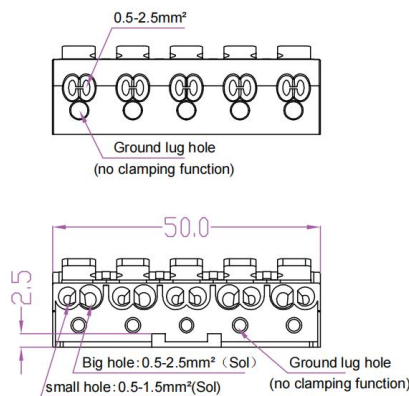



4. Wiring Diagram

Figure: Voltage peaks for LED driver without earthing (Above) and with earthing (Below)

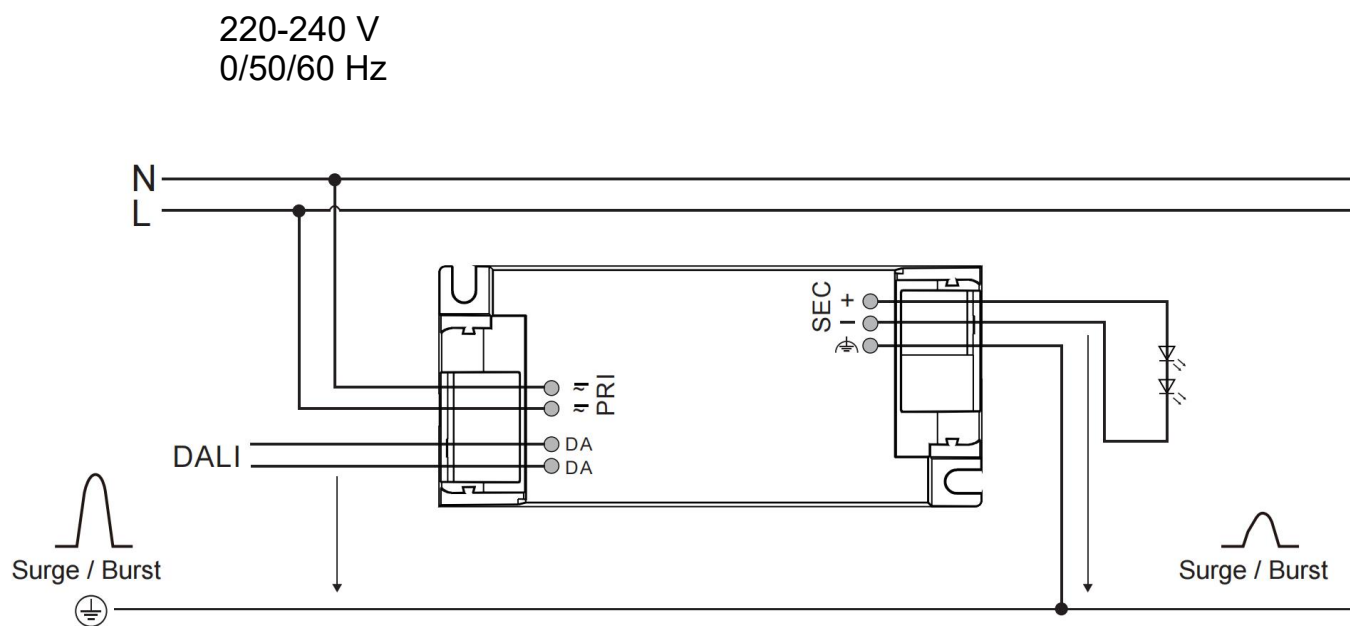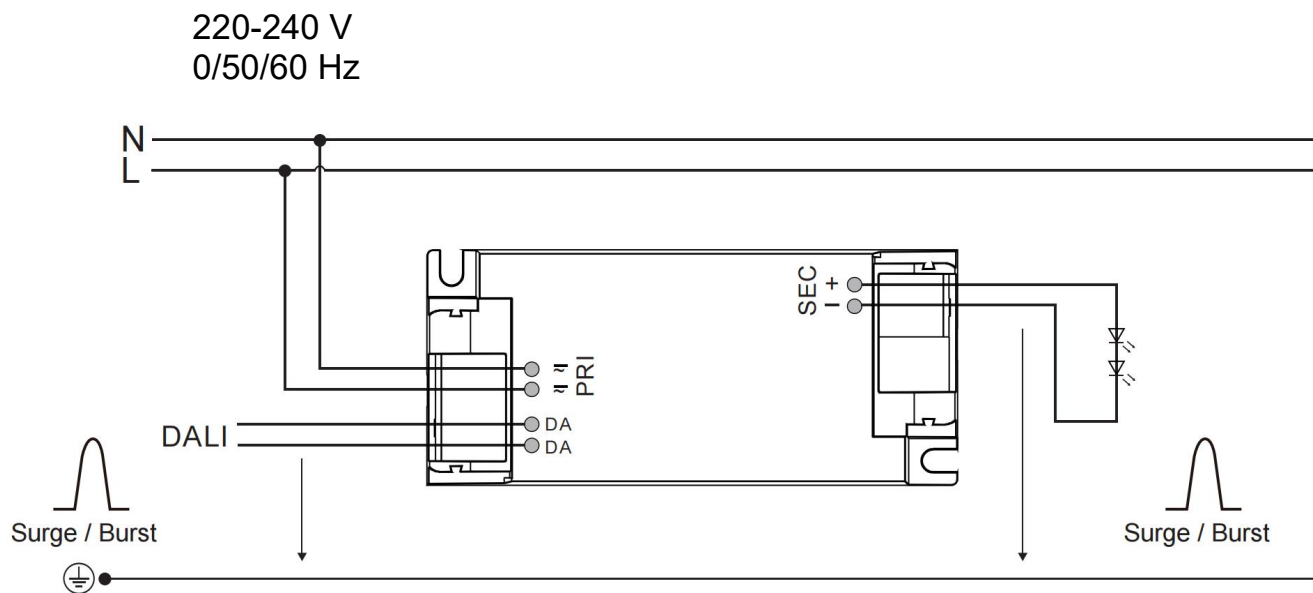


Push Dimming

Figure: Voltage peaks for LED driver without earthing (Above) and with earthing (Below)

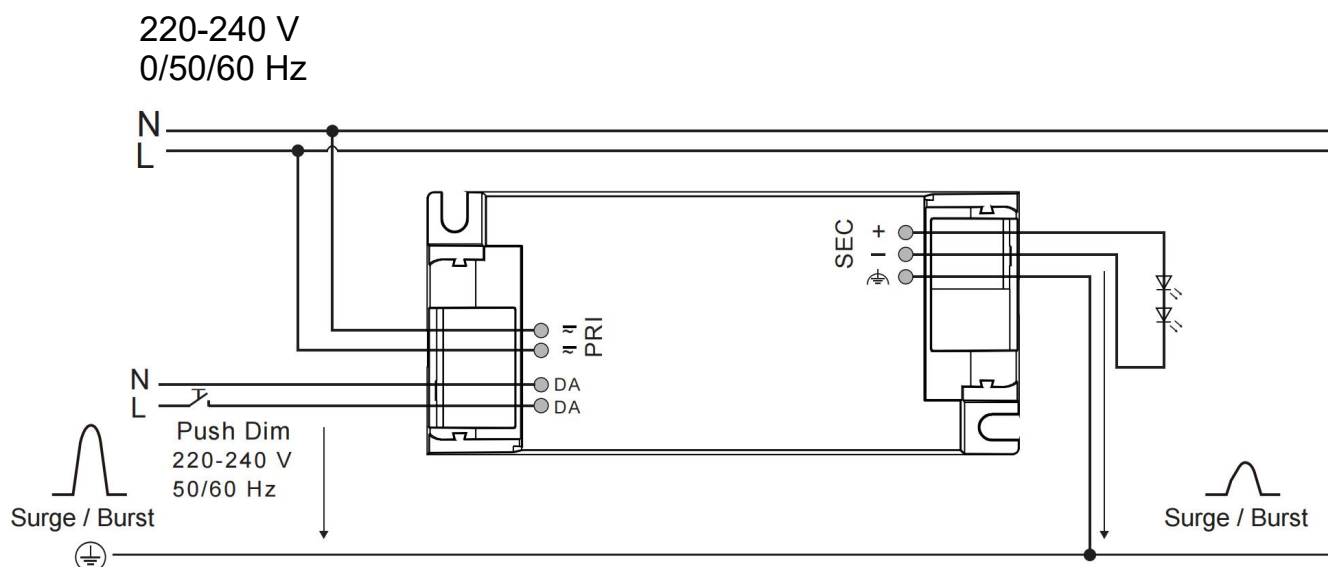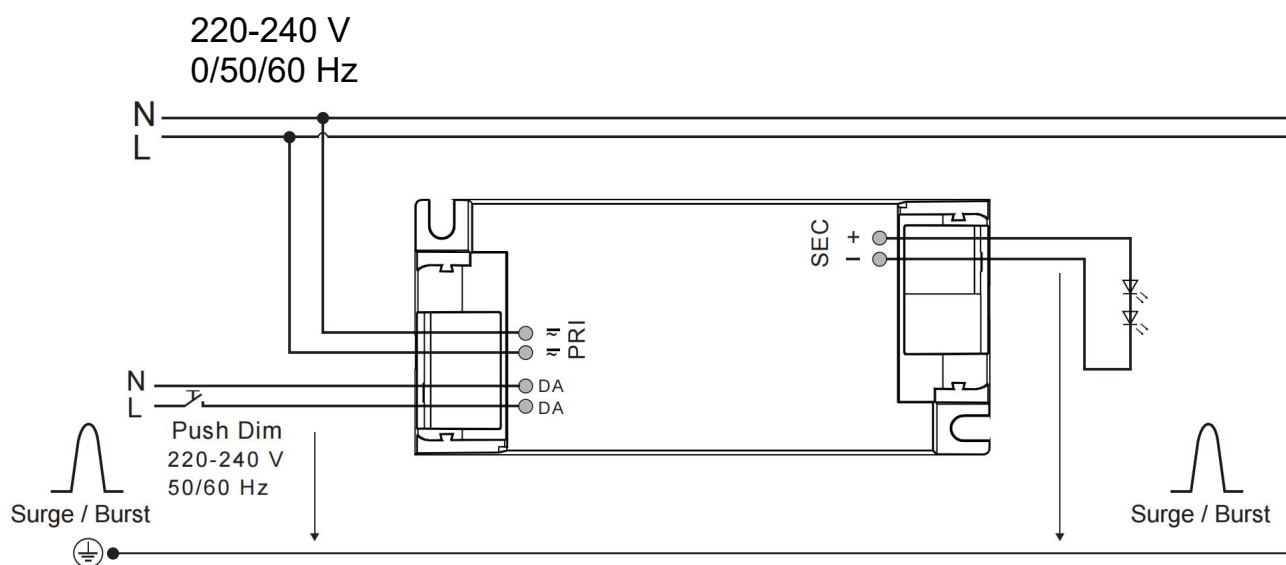


5. Electrical values


1. Operating power windows

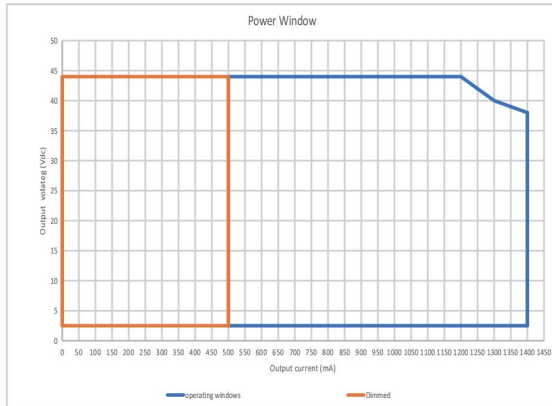


2. Efficiency v.s. Load

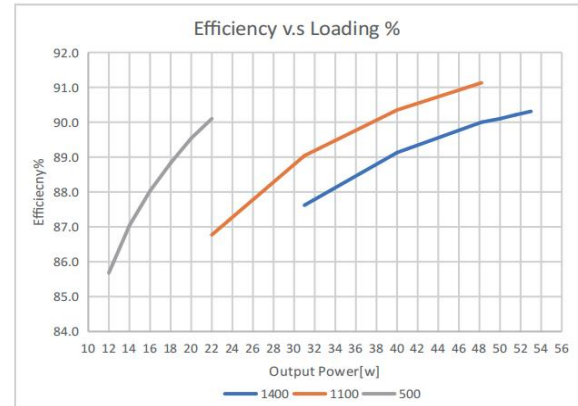


3. PF v.s. Load

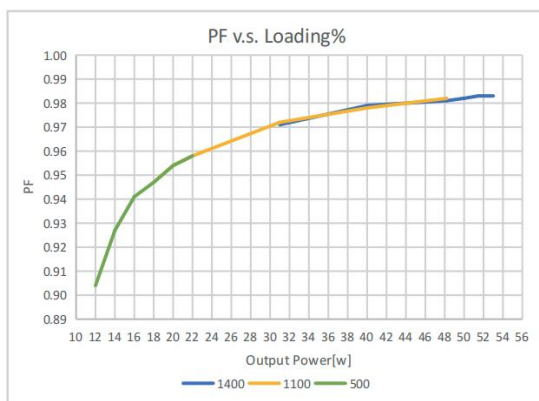


4. THD v.s. Load

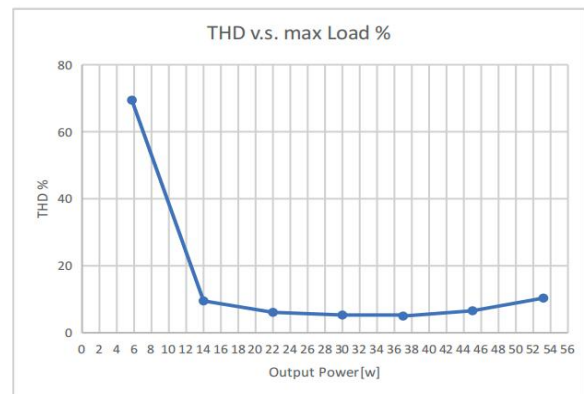

5. Life time

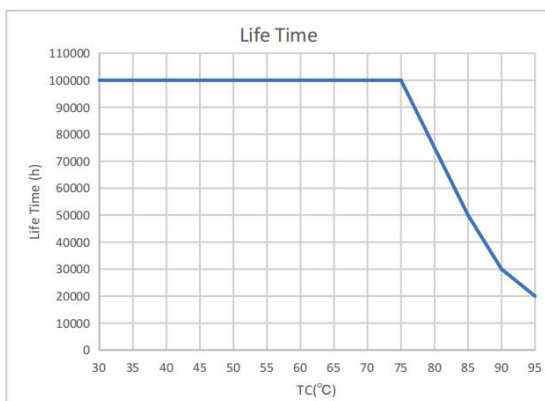

6. Derating

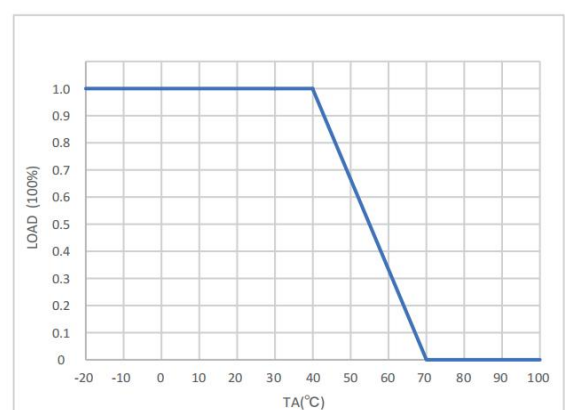


6. DALI dimming curve

formula for DALI dimming.

$$X(n) = 10^{\left\{ \left[\frac{(n-1)}{(253/3)} \right] - 1 \right\}}$$

Here, n means the target dimming stage of the total 254 stages.

X(n) means the percent of the maximum output current

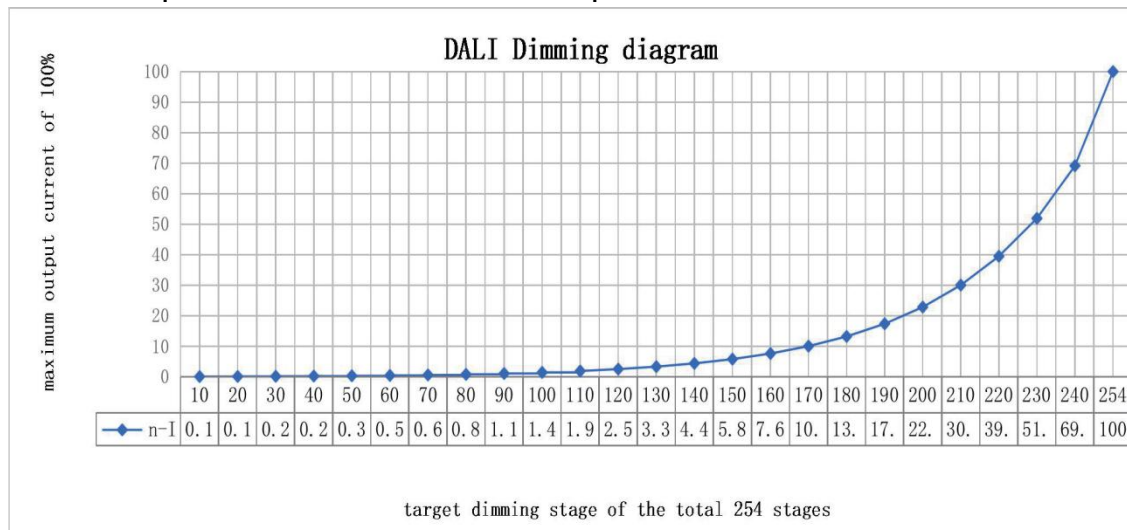

7. Function of the earth terminal:



The earth connection is conducted as protection earth (PE). The LED Driver can be earthed via earth terminal or metal housing

(if device has metal housing). If the LED Driver will be earthed, protection earth (PE) has to be used. There is no earth connection required for the functionality of the LED Driver. Earth connection is recommended to improve following behaviour.

- Electromagnetic interferences (EMI)
- LED glowing at standby


In general, it is recommended to earth the LED Driver if the LED module is mounted on earthed luminaire parts respectively heat sinks and thereby representing a high capacity against earth.

Avoiding residual LED glow on standby Residual LED glow on standby may occur as a result of capacitive leakage currents from the LED module onto earthed luminaire parts (such as the heat sink). This mainly affects high-efficiency LED systems with large surface areas installed in luminaires with protection class 1.

The topology has been improved so that residual LED glow can be virtually eliminated by earthing the devices.

8. Packing information

Built-in type

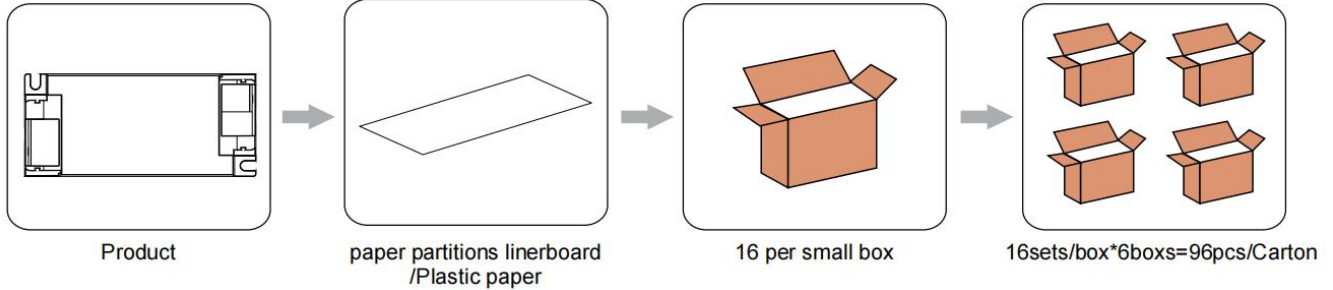


Inner box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
252*202*53	16	0.148	2.34	2.62

Outer box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
425*270*185	96	0.148	14.58	16.22

Small Strain reliefs

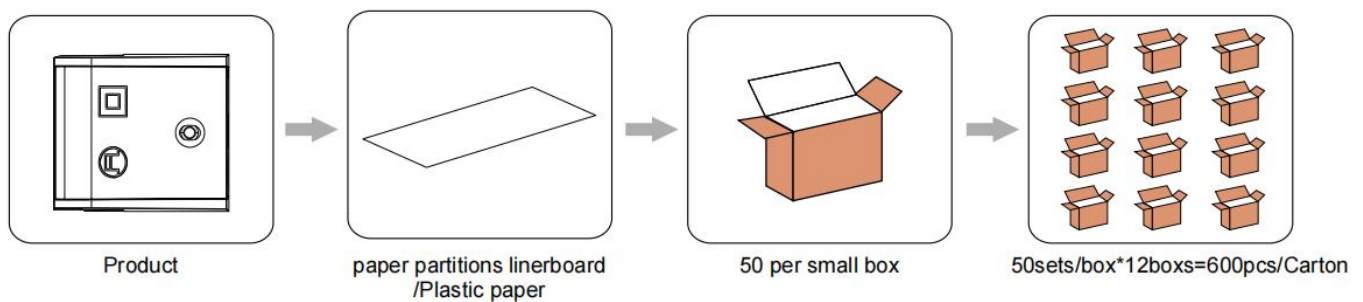


Inner box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
224*138*90	50	0.018	0.90	1.26

Outer box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
460*430*195	600	0.018	11.50	12.00

Large Strain reliefs

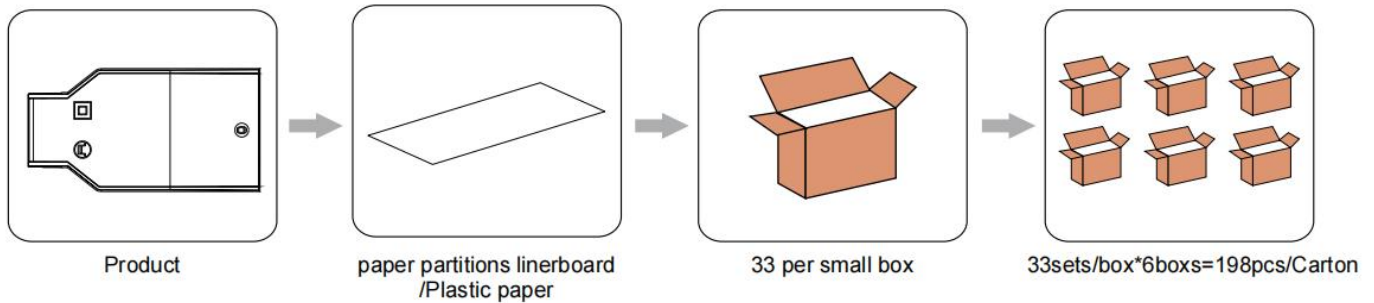

Inner box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
300*180*122	33	0.062	2.06	2.35

Outer box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
375*315*385	198	0.062	12.30	13.90

9. Ordering Data


Model No	Item code
CC53W500-1400-DALI-NFC-NX	157550
SR_CC_44-53-60	148001
SR_CC_44-53-60_5POL	148021

10. NFC current setting:

NFC Reader (optional)

Feature:

Easily on-line read a output current from a driver or write a new current data to a driver throughout NEX·IVO NFC reader within few seconds.



Model No	Description	Interface	Matching antenna	Zhaga approval	Usage
ID CPR30+ 	Desktop programmer	USB	Integrated	Yes	Single Programming on Desktop
ID ISC.PRH101-USB 	Handheld programmer	USB	Integrated	Yes	Single Programming by Handheld
ID ISC.MR102-USB 	Middle range programmer, for connecting external antenna	USB	RF-MANT12786 	Yes	Single Programming on Product line
ID ISC.LR1002-E 	Long range programmer, for connecting external antenna	USB, RS232, TCP/IP	ID ISC.ANT310/310 	Yes	Multi Programming System

APP NFC

Feature:

Quickly check output current of a LED driver simply via iPhone smart phone, as well as, correct or setup a new current data immediately with no extra equipment at any job site

iPhone ICON



Main



Download method

1.Scan the QR code to download



2.On your iPhone, search for KGP NFC in APP Store to download it



Phone smartphones with NFC can be downloaded and used directly

Download method

1.Scan the QR code to download



Android smartphones with NFC can be downloaded and used directly

Android ICON



Main



Product	Description	Interface	Matching antenna	Zhaga approval	Usage
ID ECCO Smart HF-BLE 	Handheld wireless programmer	USB,Bluetooth LE V4.2 & V5.0	Integrated	Yes	Handheld programming, installation and maintenance work

11. Constant light output (CLO)

<https://www.kdocs.cn/l/cbWalbA1eiBv>

12. Push Dim :

12.1 On / off:

Short push (120ms-600ms) on the switch

Stepless dimming: long push (> 0.6sec) on the switch

12.2 Power-on memory function

When the LED driver is powered on, it will restore the memory before the LED driver is powered off. (brightness remembers the brightness after the last dimming is stable, and the brightness during dimming is not memorized)

12.3 Light on/off

If the light is on, the light will be off after a short press. If the light is off, the light will be on after a short press. The time range of short press is 120-600mS.

12.4 PUSH Dimming

Press and hold the push switch for a long time, the light will enter the dimming state, if the previous time is dimming, it will automatically turn to dimming the next time. After releasing the reset button, the dimming stops and the current illuminance is maintained. The dimming range is 1%-100%. The default is to dim when the power is first long-press. If the brightness of the power-on is the maximum brightness, the first long-press is to dim. (Long press 0.6-3S to start dimming.)

12.5 Forced synchronization

Long press for 10 seconds to turn on all the lights and turn on the same brightness (50%), and continue to quickly short press will not change. After a short period of time without short press operation, the module exits the synchronization mode, and the short press restores the switch function.

12.6 PUSH Dimming rate

Long press the push switch 10S to switch the dimming rate to 3S, Long press the push switch 20S to switch the dimming rate to 6S.

13. REVISION HISTORY

Date	Revision	Remark
2026.16.03	V0.01	Product release