


3D TUBE 25 RIGIDE


Ø : 25mm

3D Bending

360° Light direction

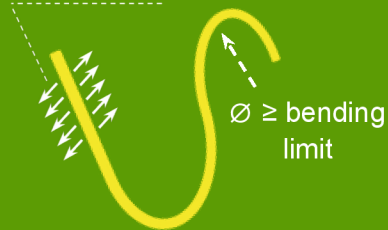


Cross Section

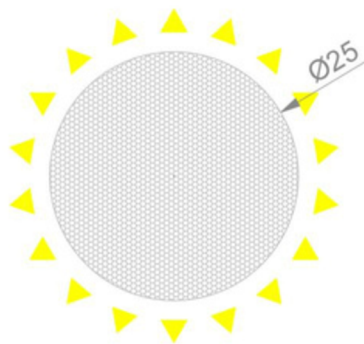

End Processing



Axial Entry



Side Entry


Type 1 :
Injection molding



Type 2 :
Plate sealed by silicon glue



Mounting Accessory

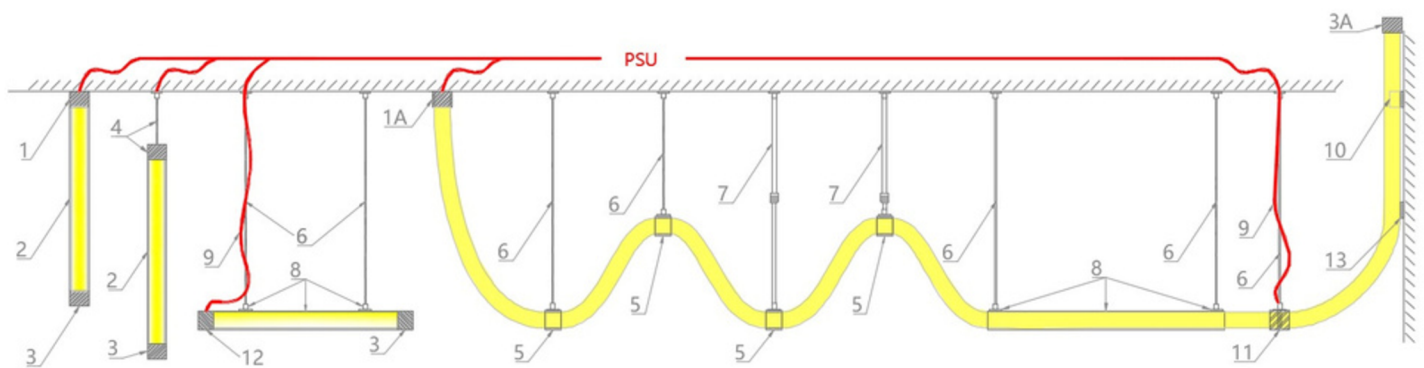

- 1: Aluminum mounting cap with cable entry (assemble with tube)
- 1A: Aluminum mounting cap with cable entry
- 2: Transparent PC tube 3: Aluminum end cap
- 3A: Aluminum end cap 4: Hanging cap with built-in power cable

- 5A: Tube(L38mm) with 1x hanger
- 5B: Tube(L100mm) with 1x hanger
- 6: Hanging wire
- 7: Extension Hanging Rod
- 8: Transparent PC tube with 2x hanger

- 9: Power cable
- 10: Transparent surface mounting clip
- 11: Splicing Kit : with 1x hanger + cable entry
- 12: Side cable entry power cap
- 13: Transparent surface mounting clip (invisible installation use)



3D TUBE 25 RIGIDE -Mono White

※ 1800K, 2100K, 2400K, 5000K available

| Item Code | CRI | Power /m | 2700K | 3000K | 4000K | 6500K | Max-Load @Single feed | Input | Cut-unit | Bending Limit | IP Rate |
|-----------|-------|----------|---------|---------|---------|---------|-----------------------|-------|-----------------|---------------|---------|
| | Ra≥90 | 15 W | 891 lm | 958 lm | 1006 lm | 996 lm | 10 m | DC24V | 50mm | ø≥400mm | IP67 |
| | Ra≥90 | 15 W | 1404 lm | 1509 lm | 1585 lm | 1570 lm | 8 m | DC24V | 62.5mm | ø≥400mm | IP67 |
| | Ra≥90 | 15 W | 821 lm | 883 lm | 927 lm | 918 lm | 10 m | DC24V | Free Cut | ø≥400mm | IP67 |

3D TUBE 25 RIGIDE -Dynamic White

※ Other color range available

| Item Code | CRI | Power /m | Full Load = | 2700K + | 6500K | Max-Load @Single feed | Input | Cut-unit | Bending Limit | IP Rate |
|-----------|-------|----------|-------------|---------|--------|-----------------------|-------|----------|---------------|---------|
| | Ra≥90 | 2 * 15 W | 855 lm | 764 lm | 855 lm | 6 m | DC24V | 50mm | Ø≥400mm | IP67 |

3D TUBE 25 RIGIDE -Dim To Warm

※ Other color range available

| Item Code | CRI | Power /m | 3000K | 1800K | Max-Load @Single feed | Input | Cut-unit | Bending Limit | IP Rate |
|-----------|-------|----------|--------|-------|-----------------------|-------|----------|---------------|---------|
| | Ra≥95 | 15W | 600 lm | / lm | 5 m | DC24V | 50mm | Ø≥400mm | IP67 |

