



NEON 0505 2D

W: 5mm
x
H: 5.5mm

Vertical Bending

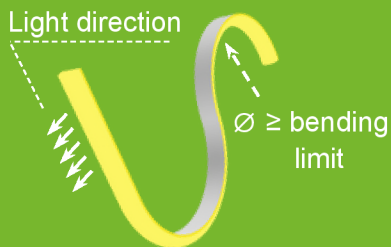

Cross Section

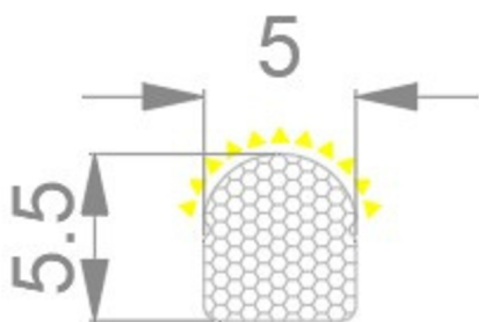

End Processing

Axial Entry




Injection Molding



Mounting Accessory

Aluminum Channel

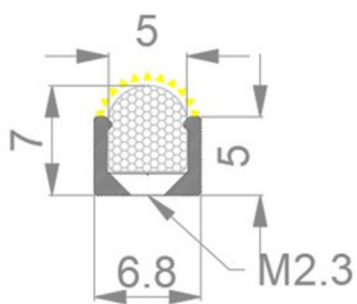


Length: 20mm



Length: 1000mm
Length: 2000mm

3M adhesive tape

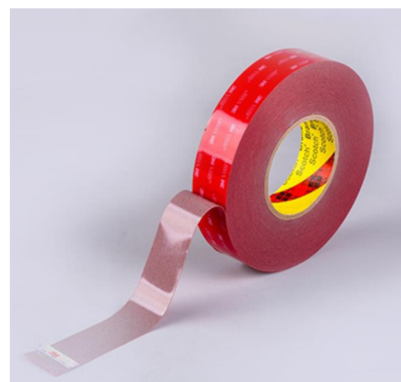

NEON 0505 2D -Mono White

※ 1800K, 2100K, 2400K, 5000K available

Item Code	CRI	Power /m	2700K	3000K	4000K	6500K	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	Ra≥90	4 W	473 lm	509 lm	534 lm	529 lm	7 m	DC24V	Free Cut	ø≥30mm	IP65
	Ra≥90	8 W	787 lm	846 lm	889 lm	880 lm	5 m	DC24V	Free Cut	ø≥30mm	IP65
	Ra≥90	12 W	1092 lm	1175 lm	1233 lm	1222 lm	4 m	DC24V	Free Cut	ø≥30mm	IP65

NEON 0505 2D -Dynamic White –2 Wires

※ Other color range available

Item Code	CRI	Power /m	Max	2700K ~ 6500K	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate	
	Ra≥90	2x 4 W	520 lm	480 lm	520 lm	7 m	DC24V	38.5mm	ø≥30mm	IP65
	Ra≥90	2x 8 W	880 lm	800 lm	880 lm	5 m	DC24V	38.5mm	ø≥30mm	IP65
	Ra≥90	2x 12 W	1200 lm	1080 lm	1200 lm	4 m	DC24V	38.5mm	ø≥30mm	IP65

NEON 0505 2D –Single Color

※ Any color from Chromaticity Diagram is available.

Item Code	Power /m	Single Red	Single Green	Single Blue	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	5.0 W	180 lm	530 lm	125 lm	5 m	DC24V	50mm	ø≥30mm	IP65
	9.0 W	320 lm	955 lm	225 lm	3 m	DC24V	50mm	ø≥30mm	IP65
	12.0 W	430 lm	1275 lm	300 lm	3 m	DC24V	50mm	ø≥30mm	IP65
	14.0 W	500 lm	1485 lm	350 lm	2.5 m	DC24V	50mm	ø≥30mm	IP65

