

# FLEX MULTI WATT CV

Patented  
4 Powers in one  
Lumen: up to 3072lm/m  
DC24V




# FLEX MULTI WATT CV

3 Powers in one  
Lumen: up to 2300 lm/m  
DC24V




# LiGHT & SMART

## Instruction of applying 4 powers:

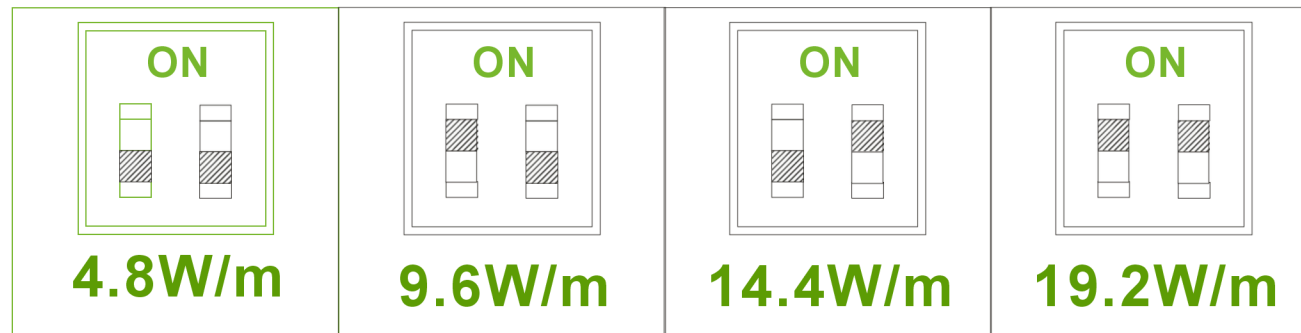

\*\*\* Note: There is one gear shifter each meter, power of whole strip can be changed by setting just one gear shifter.


## Instruction of applying 4 powers:

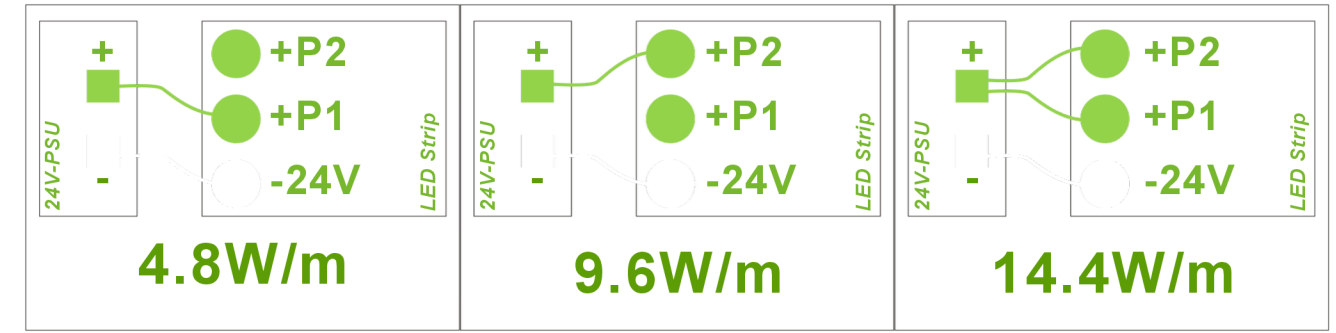

\*\*\* Note: To achieve desired power please wire as above accordingly.


## FLEX MULTI WATT CV :4 powers in 1

Item Code	CRI	LED /m	PCB	Cut Unit	Input Power	Max-Load @Single feed	* 1800K, 2100K, 2400K, 5000K available			
							2700K	3000K	4000K	6500K
	Ra≥90	128 LED	10mm	8LED 62.5mm	DC24V 4.8 W	8 m	696 lm	720 lm	744 lm	744 lm
					9.6 W	6 m	1440 lm	1480 lm	1530 lm	1530 lm
					14.4 W	5 m	2160 lm	2230 lm	2300 lm	2300 lm
					19.2 W	5 m	2880 lm	2976 lm	3072 lm	3072 lm

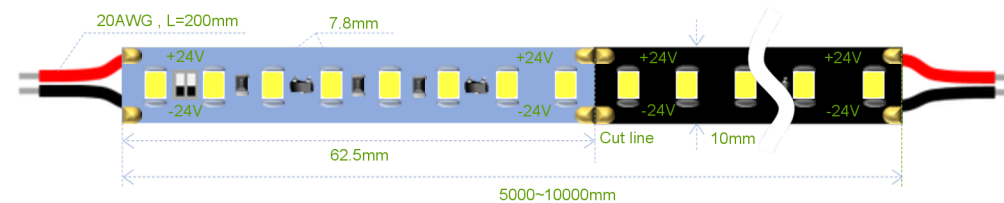

## FLEX MULTI WATT CV :3 powers in 1

Item Code	CRI	LED /m	PCB	Cut Unit	Input Power	Max-Load @Single feed	* 1800K, 2100K, 2400K, 5000K available			
							2700K	3000K	4000K	6500K
	Ra≥90	160 LED	10mm	8LED 50mm	DC24V 4.8 W	5 m	696 lm	720 lm	744 lm	744 lm
					9.6 W	5 m	1440 lm	1480 lm	1530 lm	1530 lm
					14.4 W	5 m	2160 lm	2230 lm	2300 lm	2300 lm

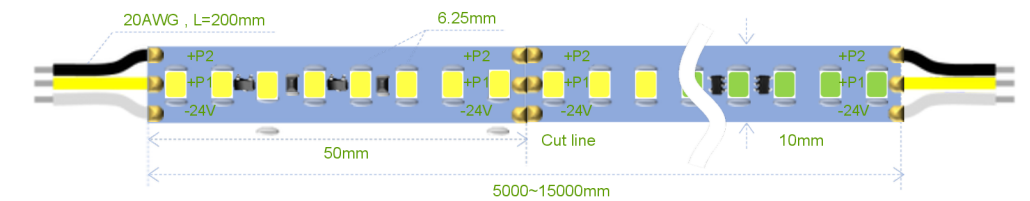

**LiGHT & SMART**

300 Avenue de l'Europe 77310 Saint Fargeau Ponthierry  
SIRET : 84973112000028 N° de TVA : FR04849731120  
contact@lightandsmart.com www.lightandsmart.com

