



NEON 2526 OPTIC 25D 3D

W: 25mm
x
H: 26mm

3D Bending

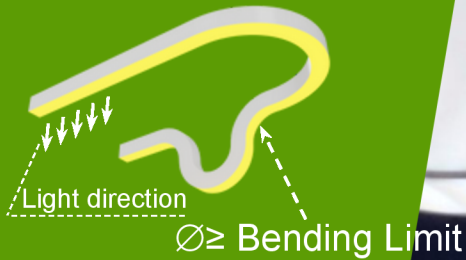

Cross Section

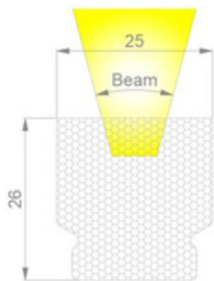

Beam Angle Options: 20°/25°/40°/50°/30°*55°

End Processing




Axial Entry



Bottom Entry

Mounting Accessory


Aluminum Channel without cable space



①
Length: 30mm (black)
Length: 1000mm (black)



②
3D Bending Without Cable Space
Length: 1000mm (black)




③
With Cable Space Length: 30mm (black)
Length: 1000mm (black)



④
3D Bending With Cable Space
Length: 1000mm (black)

Anti Glare Aluminum Channel

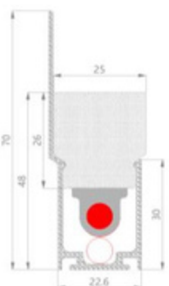

⑤
Anti Glare Length: 30mm (black)
Length: 1000mm (black)



⑥
Anti Glare Horizontal bending
Length: 1000mm (black)

Angle Adjustable Bracket



Optional for channel ①/②/③/④/⑤/⑥
Adjusting Angle: 180°

NEON 2526 OPTIC 25D 3D -Mono White

※ 1800K, 2100K, 2400K, 5000K available

Item Code	CRI	Power /m	2700K	3000K	4000K	6000K	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	Ra≥90	24 W	1490 lm	1569 lm	1647 lm	1645 lm	8 m	DC24V	3LED 125mm	Ø≥400mm	IP67

NEON 2526 OPTIC 25D 3D -Dynamic White

※ Other color range available

Item Code	CRI	Power /m	Full Load	= 2500K	+ 5700K	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	Ra≥90	2 *12 W	1407 lm	640 lm	767 lm	5 m	DC24V	6LED 250mm	Ø≥400mm	IP67

NEON 2526 OPTIC 25D 3D- RGBW @ Perfect "White Balance"

※ White option: 2700K, 3000K, 4000K, ...

Item Code	Power /m	Full Load	= Red 6W	+ Green 6W	+ Blue+ 4000K 6W	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	24 W	1078 lm	179 lm	460 lm	128 lm	311 lm	5 m	DC24V	250mm	Ø≥400mm IP67

NEON 2526 OPTIC 25D 3D -Pixel DMX512

※ Control signal: DMX+(A), DMX-(B)

Item Code	Color	Pixel	DMX Power Addr.	Power /m	Lumen Flux	Max-Load @Single feed	Input	Cut-unit	Bending Limit	IP Rate
	Mono	4pix/m	4x Addr.	24 W	1647 lm @4000K-Ra90+	5 m	DC24V	6LED 250mm	Ø≥400mm	IP67
	Dynamic White	4pix/m	8x Addr.2*	12 W	640 lm @ 2500K 767 lm @ 5700K 1407 lm @ Full	5 m	DC24V	6LED 250mm	Ø≥400mm	IP67
	RGBW	4pix/m	16x Addr.	24 W	179 lm @ Red 460 lm @ Green 128 lm @ Blue 311 lm @ 4000K 1078 lm @ Full	5 m	DC24V	6LED 250mm	Ø≥400mm	IP67

