


IP68 Waterproof Connector

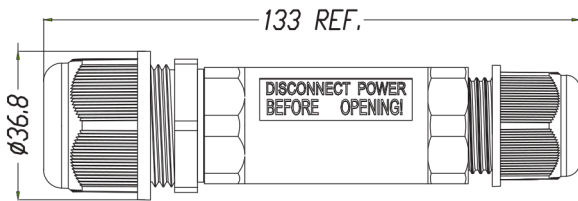

P-25-VI-XP

(X = number of poles X = 2 or 3)

Wiring methods:

Screw wiring

Housing Material: PA66

Seal Ring Material: Silicone Rubber

Terminal Material: Copper alloy

IP Rating: IP68

Fire Rating: UL94 V-0

Rated Voltage: 450V

Rated Current: 32A

Wire Section: 0.5~4mm²

Outer Cable Diameter: 5-9mm, 9-12mm, 10-14mm

Ambient Temperature: -40°C~105°C

Warranty: 3 Years

Packaging

Export Carton (L*W*H): 42*30*34cm

Quantity: 25pcs / PE PACK

250pcs / CTN

Gross Weight: P-25-VI-XP-2P --- 12.8KGs

P-25-VI-XP-3P --- 13.3KGs

P-25-VI-XP-4P --- 14KGs

P-25-VI-XP-5P --- 15KGs



Options

| Number of Poles | 2Pin | 3Pin | 4Pin | 5Pin |
|------------------|--------|--------|---------|------|
| Seal ring | | | | |
| Cable range | 5~9mm | 9~12mm | 10~14mm | |
| Stripping length | 6~8 mm | | | |

Installation Illustration

