


IP68 Waterproof Connector

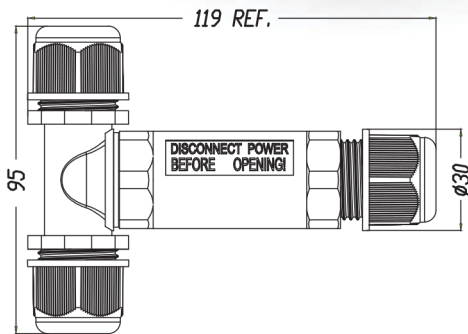

Options

Number of Poles	 2Pin	 3Pin	 4Pin	 5Pin
Seal ring				
Cable range	5~9mm	9~12mm	10~14mm	
Stripping length	8~10 mm			

PT-25-VC-XP

(X = number of poles X = 2 or 3)

Wiring Method:

Screw wiring

Housing Material: PA66

Seal Ring Material: Silicone Rubber

Terminal Material: Copper alloy

IP Rating: IP68

Fire Rating: UL94 V-0

Rated Voltage: 450V

Rated Current: 32A

Wire Section: 0.5~4mm²

Outer Cable Diameter: 5-9mm, 9-12mm, 10-14mm

Ambient Temperature: -40°C~105°C

Warranty: 3 Years

Packaging

Export Carton (L*W*H): 42*30*34cm

Quantity: 20pcs / PE PACK

120pcs / CTN

Gross Weight: PT-25-VC-XP-2P --- 9.8KGs

PT-25-VC-XP-3P --- 10.5KGs

PT-25-VC-XP-4P --- 11KGs

PT-25-VC-XP-5P --- 11.4KGs



Installation Illustration

