


C-15-S-XP-MF IP68 Waterproof Connector

Patented
Self-locking Design

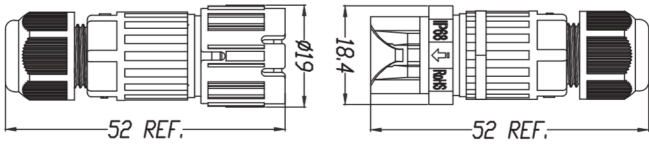

C-15-S-XP-M/C-15-S-XP-F

Male & Female Self-locking Connector
(X = number of poles X = 2/3/ or 4)

Wiring methods:

Solder wiring: Suitable for 2/3/4 pins

Housing Material: PA66

Seal Ring Material: Silicone Rubber

Terminal Material: Copper alloy

IP Rating: IP68

Fire Rating: UL94 V-0

Rated Voltage: 450V

Rated Current: 10A

Wire Section: 0.5~1.5mm²

Outer Cable Diameter: 2.5-4.5mm, 3.5-7mm

Pluggable Life: 1,500 times

Ambient Temperature: -40°C~105°C

Warranty: 3 Years

Options

Number of Poles	 2Pin	 3Pin	 4Pin
Seal ring			
Cable range	2.5~4.5mm	3.5~7mm	3.5~7mm
Stripping length	6~7mm		

Packaging

Export Carton (L*W*H): 42*30*34cm

Quantity: 100pcs / PE PACK (Male & Female packed separately)
1,000pcs / CTN

Gross Weight: C-15-S-XP-MF-2P --- 21KGs

C-15-S-XP-MF-3P --- 22.8KGs



Installation Illustration

