

CC44W700-1050-NX

Constant Current Driver

Model: CC44W700-1050-NX



Model	Item Code	Output current	Input current	Input power	Output power range	PF	Efficiency	Output voltage	No load voltage
CC44W700-1050-NX	157490	700mA	0.16A	35.10W	19.20-31.50W	0.95	89%	27-45V	55V
		750mA	0.17A	37.80W	20.60-33.70W				
		800mA	0.18A	40.30W	22.00-36.00W				
		850mA	0.19A	42.90W	23.40-38.20W				
		900mA	0.19A	42.40W	24.70-37.80W		90%	27-42V	
		950mA	0.20A	44.70W	26.00-39.90W				
		1000mA	0.21A	46.90W	27.30-42.00W				
		1050mA	0.22A	49.00W	28.50-44.10W				

* Test result @230V, 50Hz, Full Load.

1. Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	IP Grade	IP20
	Insulation Class	Class II
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Range of DC Input Voltage	170-276VDC
	Frequency	50/60Hz
	Input Current	≤0.28A
	Input Power	≤50W
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤10% (230VAC, full load)
	No-load Power Consumption	≤0.5W @230VAC
	Inrush Current	≤21A/180us (230VAC, Full-load)
	Connected quantity of 10A Breaker	8pcs/type A ; 29pcs/type B ; 46pcs/type C
	Connected quantity of 13A Breaker	10pcs/type A ; 37pcs/type B ; 59pcs/type C
	Connected quantity of 16A Breaker	29pcs/type A ; 46pcs/type B ; 74pcs/type C
	Connected quantity of 20A Breaker	36pcs/type A ; 58pcs/type B ; 93pcs/type C

Output	Current Accuracy	±5%
	Max. Output Power	44W
	Started Delay Time	≤0.5S (230VAC, full load)
	Current Ripple	±3% (Imax-Imin) / (Imax+Imin)
	PSTLM	≤1
	SVM	≤0.4
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	Auto Recovery
	Insulation voltage	I/P to O/P, 3KVac/1min
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P < 250μA
Environment	Ta/Operation Temperature	19-40W: -20...+45°C; 44W: -20...+40°C
	Ts/Storage Temperature	-40....+85°C
	Tc/Enclosure Temperature	85 °C
	Humidity	10%.... 90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Build-in & Independent
	PRI Wire preparation	PVC, VDE certificated, 0.5- 1.5mm ² , with 8mm tin
	SEC Wire preparation	PVC, VDE certificated, 0.5- 1.5mm ² , with 8mm tin
	Dimension	Independent:137.5*44*23mm (L*W*H) Built in:97.5*44*23mm(L*W*H)
Standards	Certification	CE/ENEC
	Safety Standards	EN61347-1,EN61347-2-13
	EMC Standards	EN55015,EN61000-3-2,EN61000-3-3,EN61547
	Performance	EN62384
	Surge	L-N/1.5KV
Others	RoHS	Complied to 2011/65/EU
	Life Time	5000h Tc=95°C
		50000h Tc=85°C
		75000h Tc=80°C
		100000h Tc=75°C
	Warranty	5years, F.R. <10%


Remark:

- 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
- 2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again.
3. Please make sure Tc under Lifetime condition when long term operate under DC input.
4. Light output level in DC operation: (factory default = 100 %, EOFi = 1).


2. Output Current Setting

(CH1/CH2) Output Current	1	2	3
700mA	OFF	OFF	OFF
750mA	ON	OFF	OFF
800mA	OFF	ON	OFF
850mA	ON	ON	OFF
900mA	OFF	OFF	ON
950mA	ON	OFF	ON
1000mA	OFF	ON	ON
1050mA	ON	ON	ON

3. Dimension

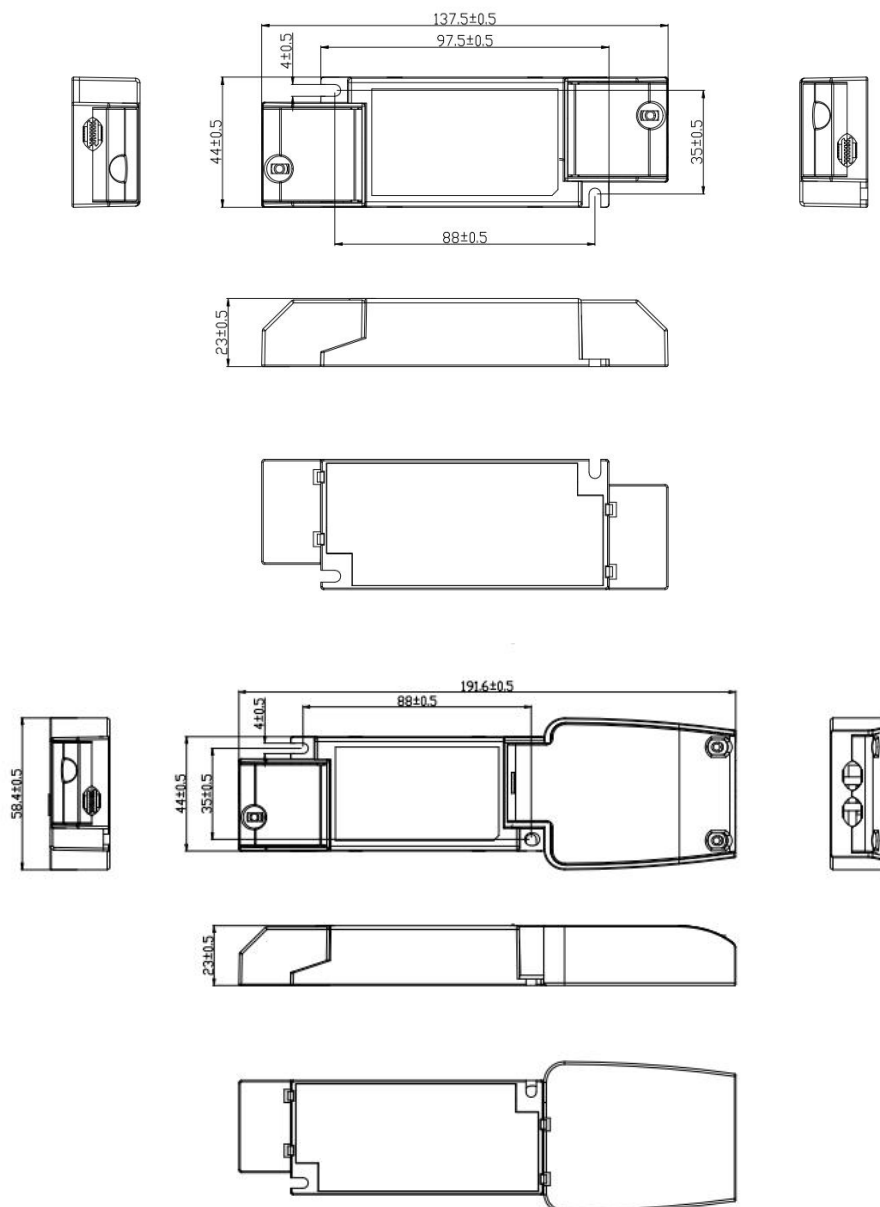

Built in type:

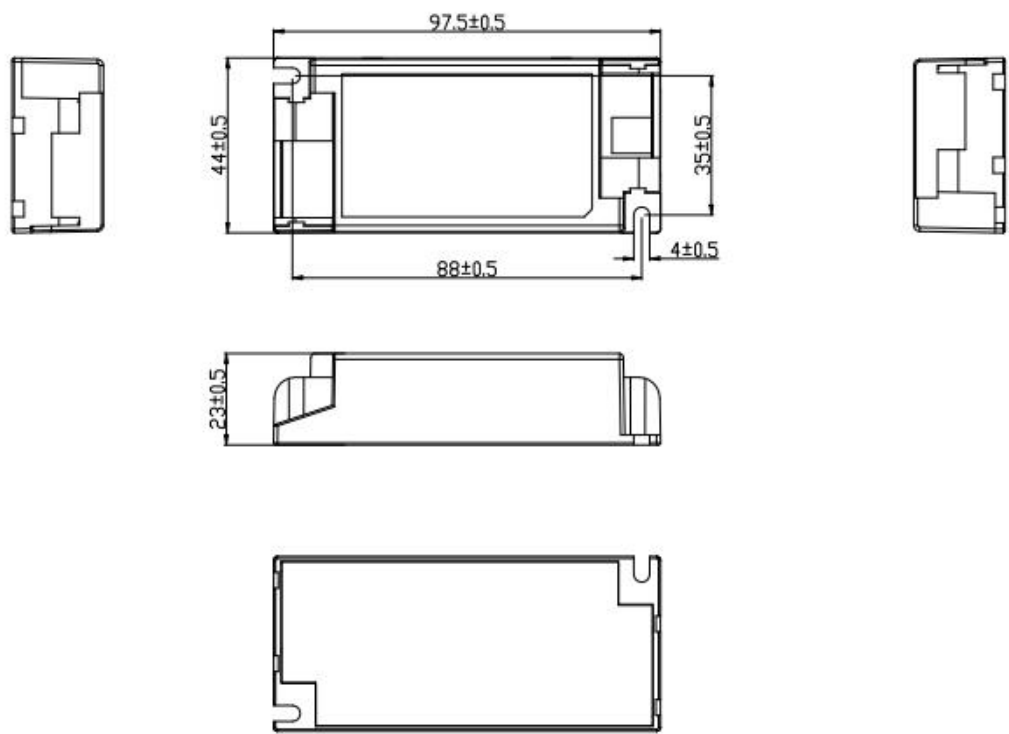

4. Label

NEXIVO
by KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

CC44W700-1050-NX 157490
Constant Current LED Power Supply
U_{out} = 55V LED Only
SELV

Household
+ ● SEC
- ●

PIN1	PIN2	PIN3	I _{rated} (mA)	P _{rated} (W)	U _{rated} (V)	U _N /f _N	I _N [A]	t _a [°C]	t _c [°C]	λ	
OFF	OFF	OFF	700	31.5	27-45	220-240V 0/50/60Hz	0.16	-20...+45	85	0.95	
ON	OFF	OFF	750	33.7			0.17				
OFF	ON	OFF	800	36.0			0.18				
ON	ON	OFF	850	38.2			0.19				
OFF	OFF	ON	900	37.8	27-42		0.20	-20...+40			
ON	OFF	ON	950	39.9			0.21				
OFF	ON	ON	1000	42.0			0.22				
ON	ON	ON	1050	44.1			0.23				

PRI ~

● L

● N

OFF → ON

1

2

3

05

CE

UK CA

EAC

EL

wirepreparation

8mm wire 0.5-1.5

M M

4. Packing information

Built-in type

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
398*230*150	100	0.084	8.40	9.60

Small side cover

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
370*365*295	1000	0.0087	8.70	10.00

Large side cover


Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
375*305*295	200	0.041	8.20	9.40

5. Ordering data

Model No	Item code
CC44W700-1050-NX	157490
SR_CC21-30-44-80	147921
SR_CC21-30-44-80_3POL	147931
SR_CC21-30-44-80_5POL	147941

6. Wiring Diagram

Built in type:

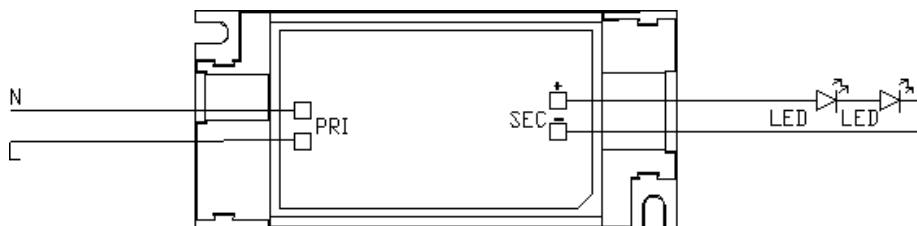

7. Revision history

Date	Revision	Remark
2026.16.03	V0.01	Product release