

Product Features


- Comply with IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207 Ed2
- Thyristor phase-cutting dimming controller supporting DALI and Touch DIM dimming
- Controlled LED thyristor dimming power supply, incandescent lamp, AC low voltage lamp, etc
- Wide voltage input 100-240VAC
- One DALI address, one channel output, maximum output current is 1.8A

Technical Parameters


Input control signal	DALI signal or Touch switch signal
Input voltage	100-240VAC 50/60Hz
Output current	1.8Amax
Output Power	396Wmax
DALI bus dissipation	2mA max
Dimension	168×39.4×30mm
Gross weight	84g
Working Temp.	-20-50°C
Lifetime	30,000H




Dimension(mm)

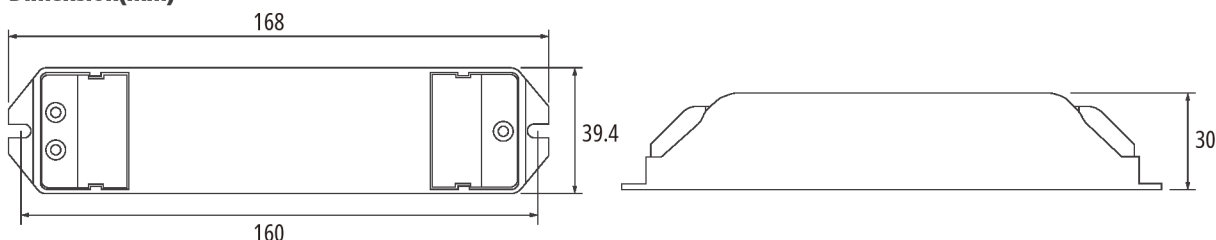

DALI Wiring

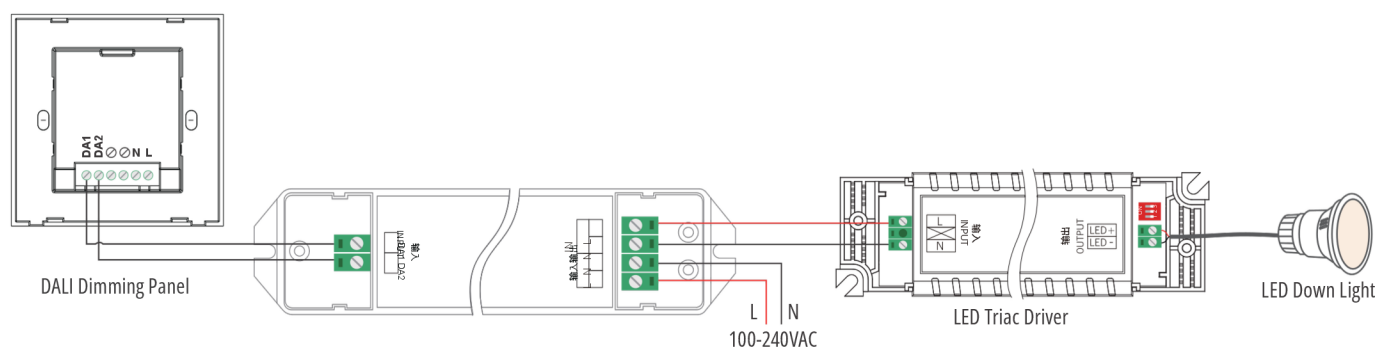

PushDIM Wiring

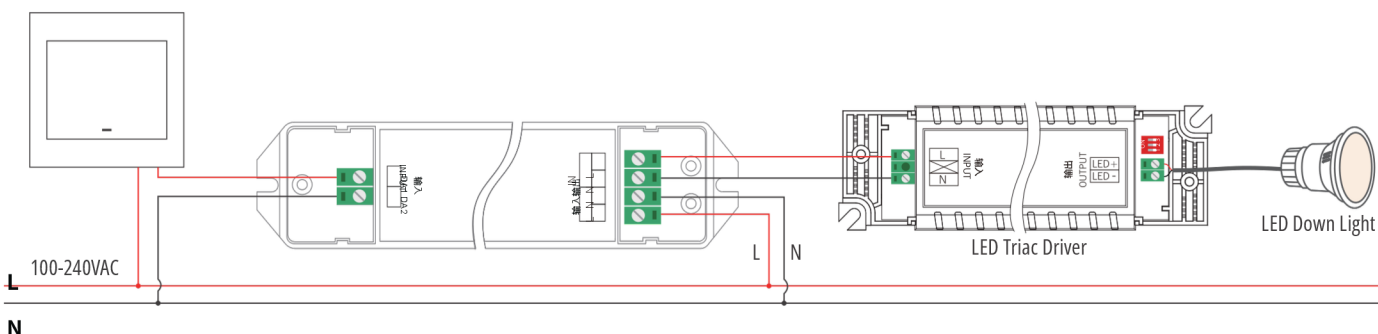

Cautions

1. Do not install the device when it is powered on.
2. Do not expose the device to heavy moisture.

